

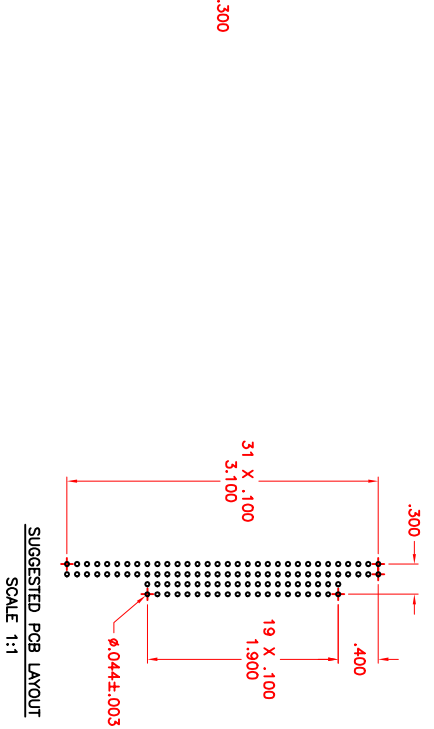
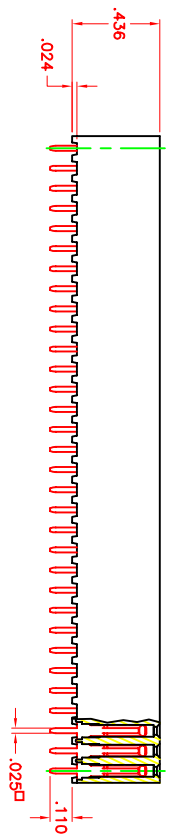


THIS DRAWING CONTAINS PROPRIETARY INFORMATION EXCLUSIVE TO COMM CON CONNECTORS AND SHOULD NOT BE USED IN PART FOR THE MANUFACTURE, REPAIR, OR REPRODUCTION OF ANY PRODUCT EXCEPT AS SPECIFIED HEREIN. COMM CON CONNECTORS, INC. 08/11/19

REVISIONS			DATE	APPROVED
ECO NO:	REV:	DESCRIPTION	DATE	APPROVED
9XXXX	*	REVISED	08.08.06	

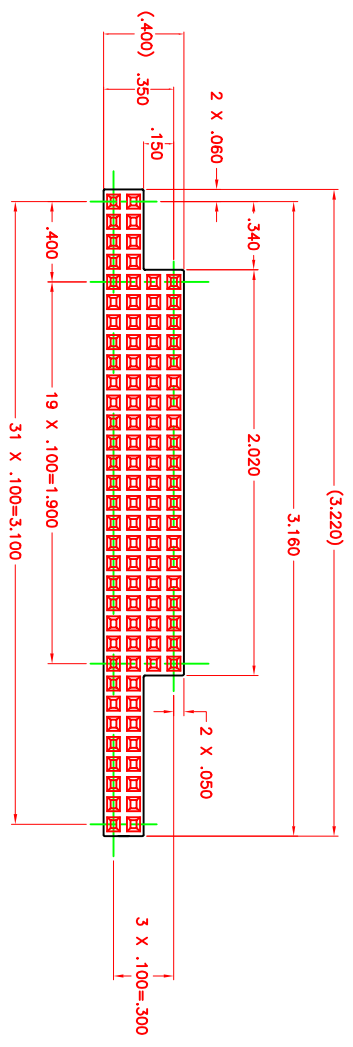

1. FINISH: G2LF-GOLD PLATE PER MIL-G-45204, TYPE II, .000010 MIN. ON ENGAGEMENT END, AND PURE BRIGHT TIN PLATE PER MIL-T-10727, .000150 MIN. ON TERMINATION END OVER NICKEL PER QQ-N-290, .000050 MIN.
2. MATERIALS: CONTACT - PHOS/BRONZE PER C51000. INSULATOR - THERMOPLASTIC, 94V-0, BLK. RATED -65°C TO 250°C. ROHS COMPLIANT

1	104	40304-02	CONTACT, SKT., .100 PITCH,
2	1	40467	INSULATOR, PC104 SOCKET
FIND QTY		PART NO. DESCRIPTION	
LIST OF MATERIALS			
UNLESS OTHERWISE SPECIFIED: COMM CON WORLDWIDE, INC. a subsidiary of INTERCONNECT SYSTEMS INC.			
DIMENSIONS ARE IN INCHES			
AND TOLERANCES ARE:			
FRACTIONS	DECIMALS	ANGLES	
$\pm 1/64$.XX \pm .02	$\pm 1^\circ$	
	.XXX \pm .010		
DRAWN BY: JAE	DATE: 08.07.06	TITLE: CONNECTOR, SOCKET COMBO	
APPROVED:		PC104 NON STACK THROUGH	
MATERIAL: SEE NOTE 2	CAT. NO: 1184C-104YY	SIZE: A	DWG NO: 30354
FINISH: SEE NOTE 1	SCALE: 1:1	DRAWING: XXXXX	SHEET 1 OF 1