



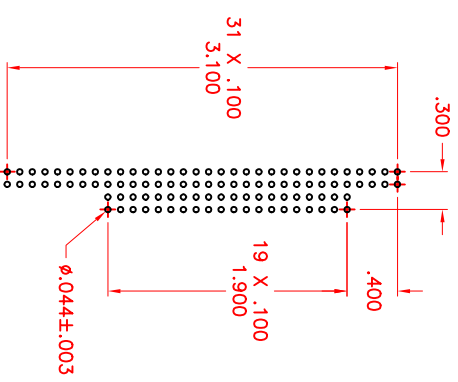

REVISIONS				
ECO NO.	REV.	DESCRIPTION	DATE	APPROVED
91XXX	B	UPDATED	07.12.06	

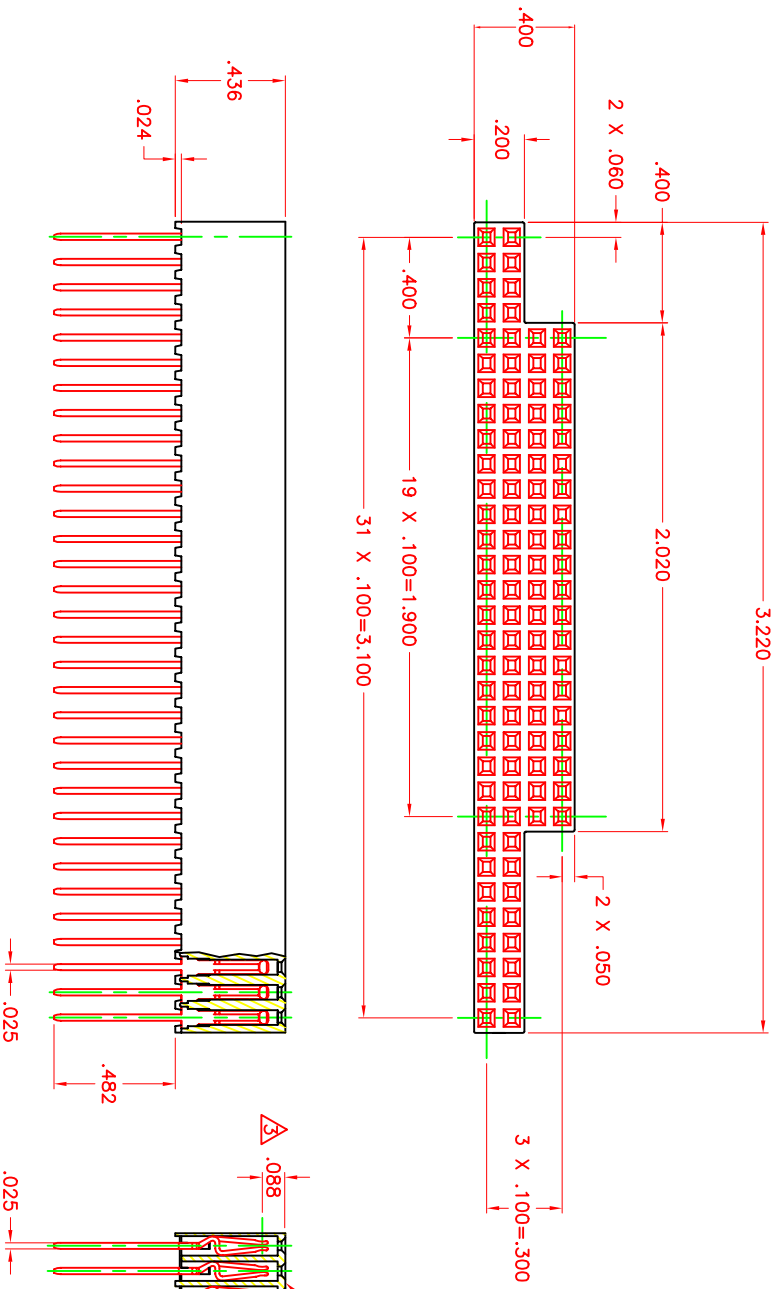

SUGGESTED PCB LAYOUT
SCALE 1:1

- △ MAXIMUM INSERTION DEPTH.
- △ POINT OF FULL ELECTRICAL ENGAGEMENT.
- 2. MATERIALS: CONTACT - PHOS/BRONZE PER CS1000.
INSULATOR - THERMOPLASTIC, 94V-0, BLK.
RATED -65°C TO 250°C. RoHS COMPLIANCE
- 1. FINISH: G - GOLD FLASH PLATE PER MIL-G-45204, TYPE II,
OVER NICKEL PER QQ-N-290, .000050 MIN.

NOTES: UNLESS OTHERWISE SPECIFIED

2	1	40467	INSULATOR, PC/104 SOCKET
1	104	40304-01	CONTACT, SOCKET, .100 PITCH, C=.506
LIST OF MATERIALS			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONS XX ± .02 ANGLES ±1/64 .XXX ± .010 ±.1° DRAWN BY: RHM DATE: 4.14.04 APPROVED: DATE: 4.14.04			
COMM CON WORLDWIDE, INC. a subsidiary of INTERCONNECT SYSTEMS INC.			
CONNECTOR, SOCKET PC/104, LONG TAIL			
DATE: 11/85C-104G		SIZE: DWG NO: 30418	REV: B
SCALE: 2:1		TOOL NO:	SHEET 1 OF 1