
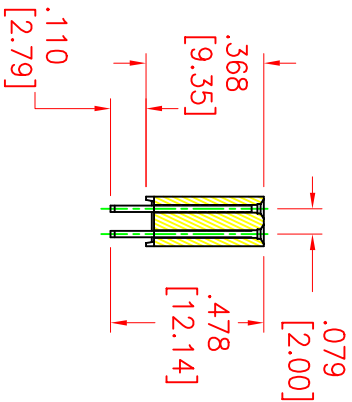
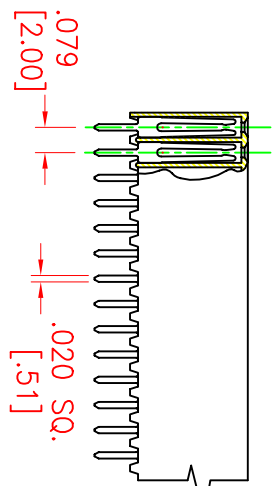


THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND IS UNLAWFULLY REPRODUCED OR DISCLOSED IN WHOLE OR IN PART TO ANY OTHER PERSON WITHOUT THE WRITTEN OR OTHER AUTHORIZED AS SPECIFICALLY AUTHORIZED IN WRITING BY SEMI CONDUCTOR, INC.

REVISIONS				
ECO NO:	REV:	DESCRIPTION	DATE	APPROVED
XXXX	X	XXXX	*	

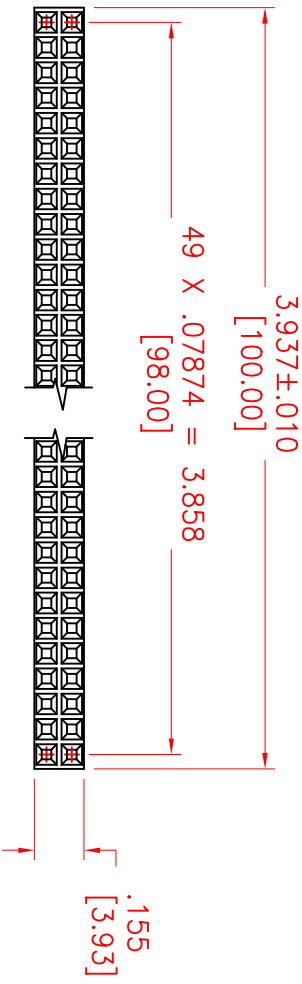

PART NUMBER: 1241H-XXXXG2LF

2	100	P40287-01	SOCKET, TUNING FORK, 2MM
1	1	40473	INSULATOR, 2MM, 2 ROW
FINN QTY	PART NO.	DESCRIPTION	

LIST OF MATERIALS

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:		COMM CON WORLDWIDE, INC. a subsidiary of INTERCONNECT SYSTEMS INC.	
FRACTIONS	DECIMALS	ANGLES	
±1/64	.XX ± .02	±1°	
.XXX ± .010			

- MATERIALS: CONTACT - PHOS/BRONZE PER C51000.
INSULATOR - XYDAR LCP RESIN G-930, 30% GF THERMOPLASTIC, 94V-0, BLK.
ROHS COMPLIANT
OPERATING TEMPERATURE: -65°C TO 250°C.
- FINISH: G2LF GOLD PLATE PER MIL-G-45204 TYPE II, .000010 MIN. ON ENGAGEMENT END AND PURE BRIGHT TIN PLATE PER MIL-T-10727, .000150 MIN. ON TERMINATION END OVER NICKEL PLATE PER QQ-N-290, .000050 MIN.

NOTES: UNLESS OTHERWISE SPECIFIED

DRAWN BY: JE	DATE: 09.13.05	TITLE: SOCKET, 2 ROW, 2MM THROUGH HOLE STACKING
APPROVED:		
MATERIAL: SEE NOTE 2	CAT. NO: 1241H-XXXX	SIZE: A
FINISH: SEE NOTE 1	SCALE: 1:1	DWG NO: 30279
		SHEET 1 OF 1