
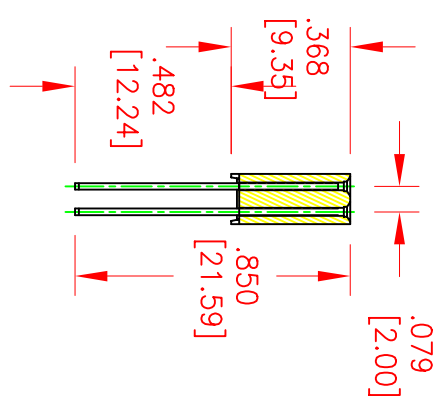
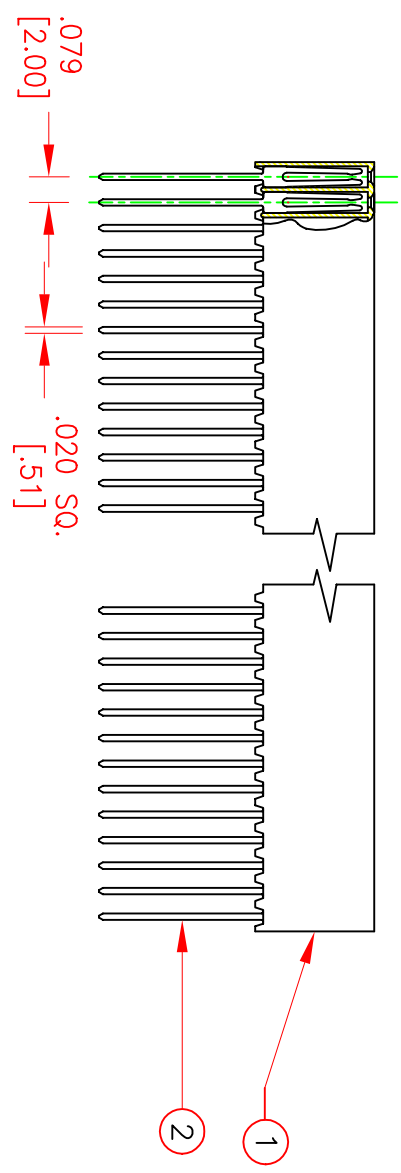


THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND SHALL NOT BE REPRODUCED, COPIED, OR DISCLOSED IN WHOLE OR IN PART FOR THE MANUFACTURE, REPAIR, OR MAINTENANCE OF ANY PRODUCT SPECIFICALLY AUTHORIZED IN WRITING BY GDM CON WORLDWIDE, INC.

REVISIONS			ECO NO:	REV:	DESCRIPTION	DATE	APPROVED
			XXXX	A	UPDATE	07.13.06	

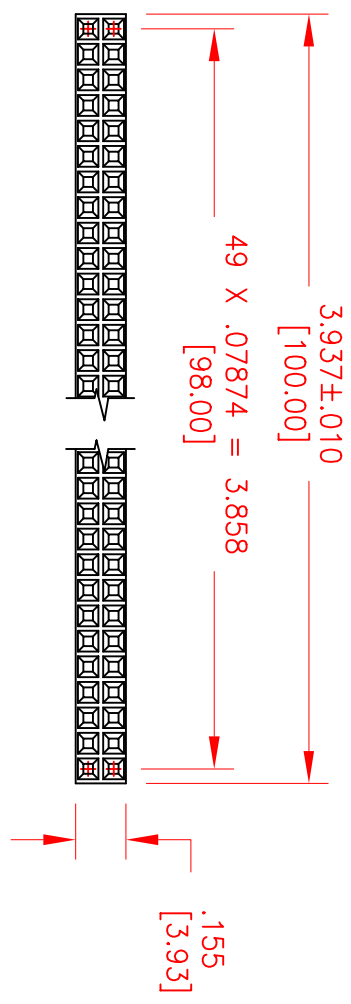

PART NUMBER: 1242H-60G  
 OR: 1242H-XXXXY

2. MATERIALS: CONTACT – PHOS/BRONZE PER C51000.

INSULATOR – XYDAR LCP RESIN G-930, 30% GF THERMOPLASTIC, 94V-0, BLK. OPERATING TEMPERATURE: -65°C TO 250°C. ROHS COMPLIANT

1. FINISH: G GOLD FLASH PLATE PER MIL-G-45204 TYPE II OVER NICKEL PLATE PER QQ-N-290, .000050 MIN.

NOTES: UNLESS OTHERWISE SPECIFIED

2	A/R	P40287-02	SOCKET, TUNING FORK, 2MM
1	1	40473	INSULATOR, 2MM, 2 ROW
FIND	QTY	PART NO.	DESCRIPTION

LIST OF MATERIALS  
 COMM CON WORLDWIDE, INC.  
 a subsidiary of  
 INTERCONNECT SYSTEMS INC.



UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: FRACTIONS DECIMALS ANGLES			
±1/64	.XX ± .02	±1°	
±.XXX	±.010		
DRAWN BY: JE	DATE: 09.13.05	TITLE: SOCKET, 2 ROW, 2MM THROUGH HOLE STACKING	
APPROVED:	DATE:	CAT. NO: 1242H-XXXX	SIZE: DWG NO: 30277
MATERIAL: SEE NOTE 2		A	REV: A
FINISH: SEE NOTE 1		SCALE: 1:1	DRAWING: 3XXXX
			SHEET 1 OF 1