
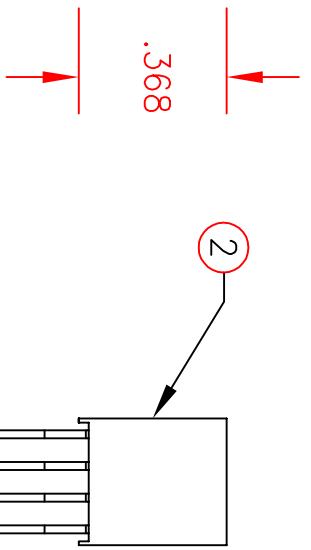
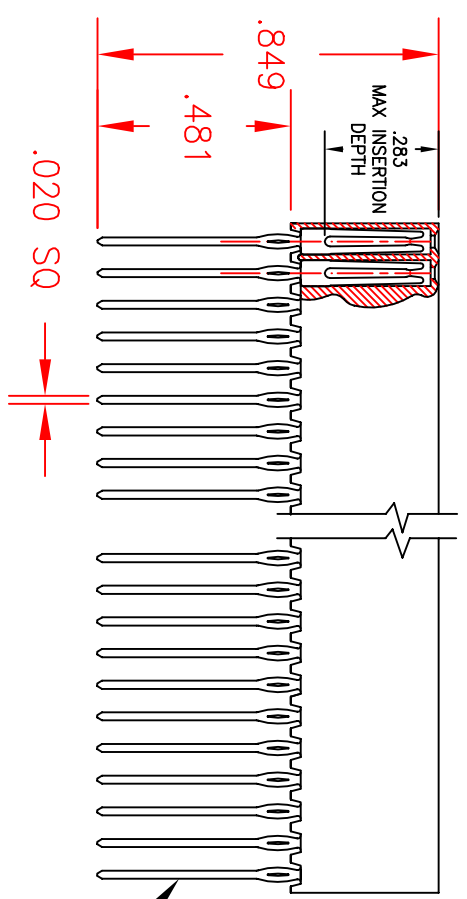


THIS DRAWING CONTAINS PROPRIETARY INFORMATION BELONGING TO GIGAMATEX CONNECTORS, AND SHALL NOT BE USED, REPRODUCED, COPIED, OR TRANSMITTED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF GIGAMATEX CONNECTORS, INC. SPECIFICALLY AUTHORIZED IN WRITING BY GIGAMATEX CONNECTORS, INC.

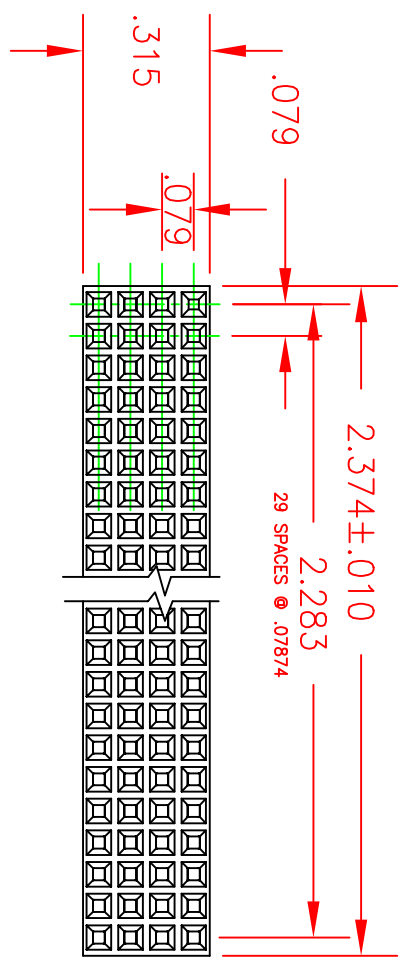

REVISIONS				
ECO NO:	REV:	DESCRIPTION	DATE	APPROVED
91XXX	A	UPDATED	07.13.06	

- MAX NUMBER OF CONTACTS: 120
- PLATING: G GOLD FLASH PLATE PER MIL-G-45204
TYPE II OVER NICKEL PLATE PER QQ-N-290,
.000050 MIN.

- MATERIALS: INSULATORS – BLACK, 30% GLASS FILLED THERMOPLASTIC, 94V-0, RATED –65°C TO 250 °C ROHS COMPLIANT
XYDAR LCP RESIN: G-930

CONTACT – PHOSPHOR BRONZE, ALLOY 51000
NOTES: UNLESS OTHERWISE SPECIFIED

LIST OF MATERIALS			
2	1	40343	2MM P, INSULATOR 4 ROW STAMPED SKT
1	A/R	P40683-02	2MM TUNING FORK SOCKET
	FIN/QTY	PART NO.	DESCRIPTION

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES

±1/64 .XX ± .02 ±1°
.XXX ± .010

TITLE: 2MM P, 4 ROW STAMPED SOCKET
PC/104-PLUS W/SHROUD, PRESS FIT

COMM CON WORLDWIDE, INC.
a subsidiary of
INTERCONNECT SYSTEMS INC.

DRAWN BY: AM	DATE: 02.22.01	CAT. NO: 1242PF-XXXX	SIZE: A	DWG. NO: 30572	REV: A
APPROVED:	DATE:	SCALE: 2:1	TOOL NO:	SHEET 1 OF 1	
MATERIAL: SEE NOTE 1	FINISH: SEE NOTE 2				