
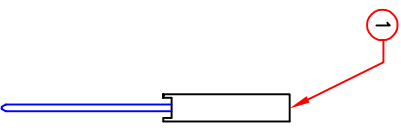
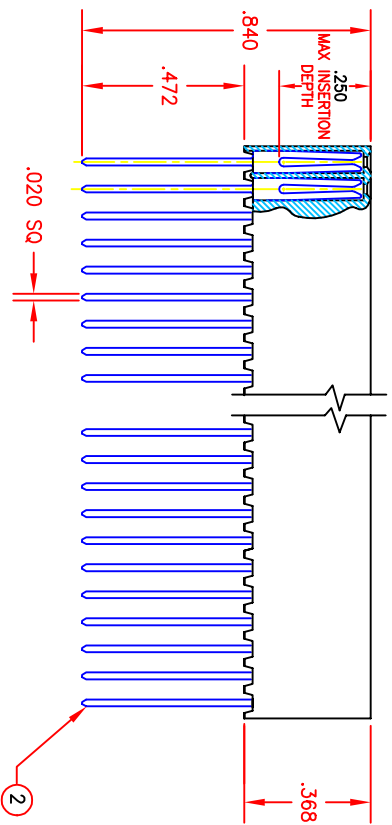


THIS DRAWING CONTAINS PROPRIETARY INFORMATION EXCLUSIVE TO CDMM. CDMM, CDMM LOGO, CDMM PART NUMBER, DIMENSIONS, AND SHAPE NOT BE USED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF CDMM. ANY REUSE OR DISTRIBUTION OF THIS DRAWING FOR OTHER PURPOSES EXCEPT AS SPECIFIED BY CDMM IS STRICTLY PROHIBITED. CDMM CDMM WAREHOUSE, INC.

REVISIONS			DATE	APPROVED
ECO NO:	REV:	DESCRIPTION	DATE	APPROVED
91XXX	A	UPDATE	07.13.06	

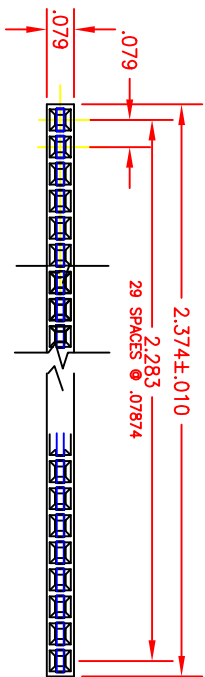

PART NUMBER: 1242Q-30G

1. FINISH: G - 3 - 5 MICRO INCHES OF GOLD OVER 50 MICRO INCHES OF NICKEL PER QQ-N-290
2. MATERIALS: CONTACT - PHOS/BRONZE PER C51000. INSULATOR - THERMOPLASTIC, 94V-0, BLK. RATED -65°C TO 250°C. ROHS COMPLIANT

NOTES: UNLESS OTHERWISE SPECIFIED

2	A/R	P40287-02	SOCKET, .020 SQ. LONG TAIL
1	1	40472	INSULATOR, 1 ROW, 2MM
FIN	QTY	PART NO.	DESCRIPTION
LIST OF MATERIALS			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: FRACTIONS DECIMALS ANGLES			
±1/64	.XX ± .02	±1°	
.XXX ± .010			
DRAWN BY: JAE	DATE: 06.01.06	TITLE: SOCKET, ONE ROW, 2MM	
APPROVED:	DATE:	PC104 PLUS, STACK THROUGH	
MATERIAL: SEE NOTE 2	CAT. NO:	SIZE: DWG NO: 30281	REV:
FINISH: SEE NOTE 1	SCALE: 1:1	DRAWING:XXXXX	SHEET 1 OF 2

