
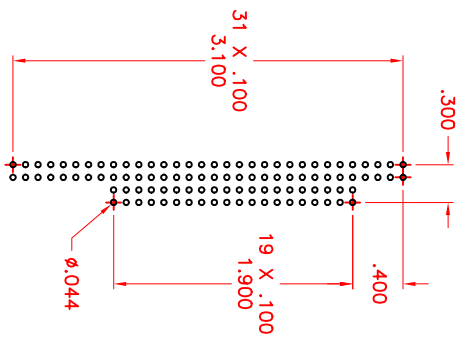


THIS DRAWING IS THE PROPERTY OF INTERCONNECT SYSTEMS, INC. IT IS TO BE USED ONLY FOR THE PROJECT AND QUANTITY SPECIFIED HEREON. IT IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF INTERCONNECT SYSTEMS, INC.

REVISIONS				
ECO NO.	REV.	DESCRIPTION	DATE	APPROVED
91922	A	Revised	4.14.04	

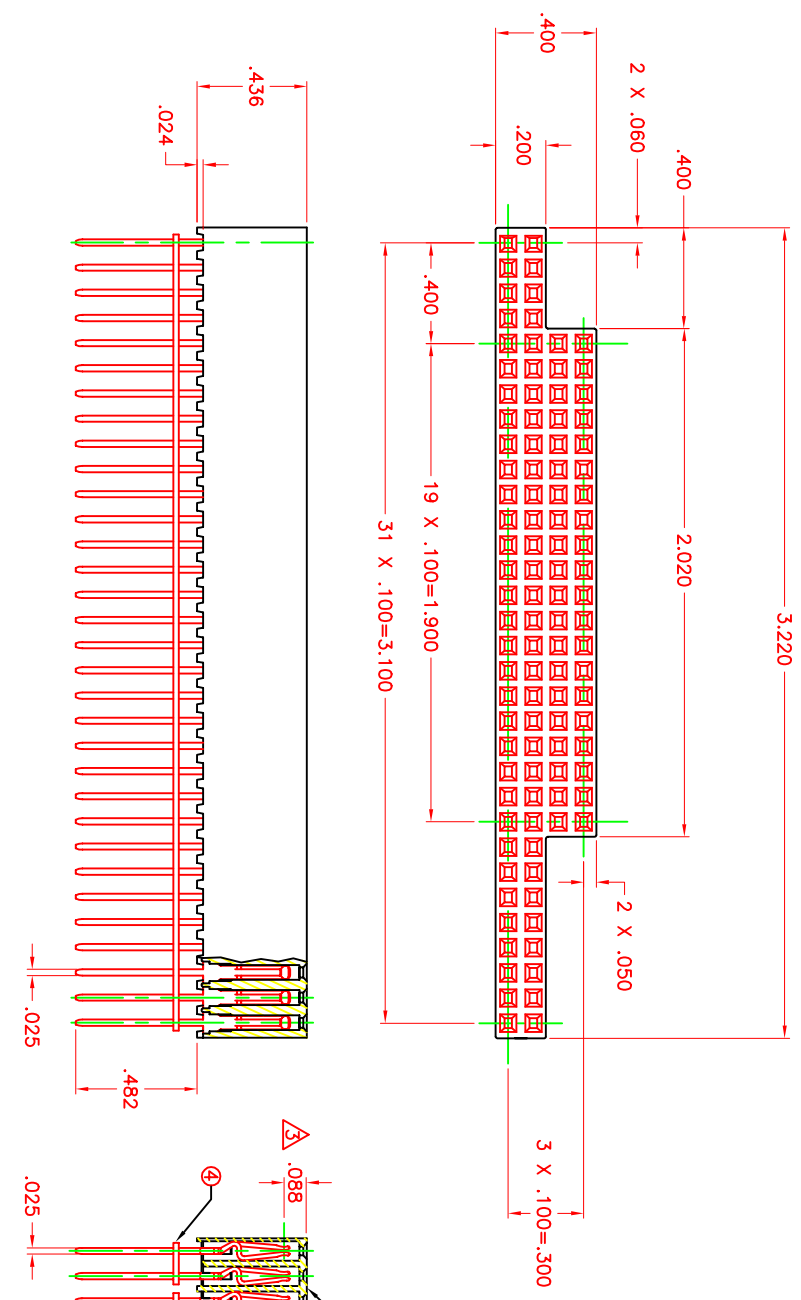

- △ MAXIMUM INSERTION DEPTH.
- △ POINT OF FULL ELECTRICAL ENGAGEMENT.

2. MATERIALS: CONTACT - PHOS/BRONZE PER C51000.
INSULATOR - THERMOPLASTIC, 94V-0, BLK.
RATED -65°C TO 250°C.
ROHS COMPLIANT
1. FINISH: G - GOLD FLASH PLATE PER MIL-G-45204, TYPE II,
OVER NICKEL PER QQ-N-290, .000050 MIN.

NOTES: UNLESS OTHERWISE SPECIFIED

FIND	QTY	PART NO.	DESCRIPTION
4	1	50595-02	SOLDER ARRAY, 32 X 2, .100 PITCH
3	1	50595-01	SOLDER ARRAY, 20 X 2, .100 PITCH
2	1	40467	INSULATOR, PC/104 SOCKET
1	104	40304-01	CONTACT, SOCKET, .100 PITCH, C=.506

LIST OF MATERIALS			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS AND TOLERANCES ARE IN DECIMALS AND ANGLES			
TITLE: COMM CON WORLDWIDE, INC. & subsidiary of INTERCONNECT SYSTEMS, INC.			
DRAWN BY: RHM DATE: 1.4.04			
CHECKED BY: JAC DATE: 1.4.04			
TOLERANCES: FRACTIONS DECIMALS ANGLES ±1/64 .XXX ±.010 ±1"			
INTERVAL:	SEE NOTE 2	CAT. NO:	SIZE/DWG NO:
FINISH:	SEE NOTE 1	50711C	B
	SCALE: 2:1	TOOL NO:	30353
			REVISION: A
			SHEET 1 of 1