THIS DRAWING CONTAINS PROPRIETARY INFORMATION EXCLUSIVE TO COMM CON CONNECTORS, AND SHALL NOT BE USED, DUPLICATED OR DISCLOSED IN WHOLE OR IN PART FOR THE MANUFACTURE, PROCUREMENT OR OTHER PURPOSES EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY COMM CON WORLDWIDE, INC.

REVISIONS

ECO NO:	REV:	DESCRIPTION	DATE	APPROVED
9XXXX	*	XXXX	XX.XX.XX	

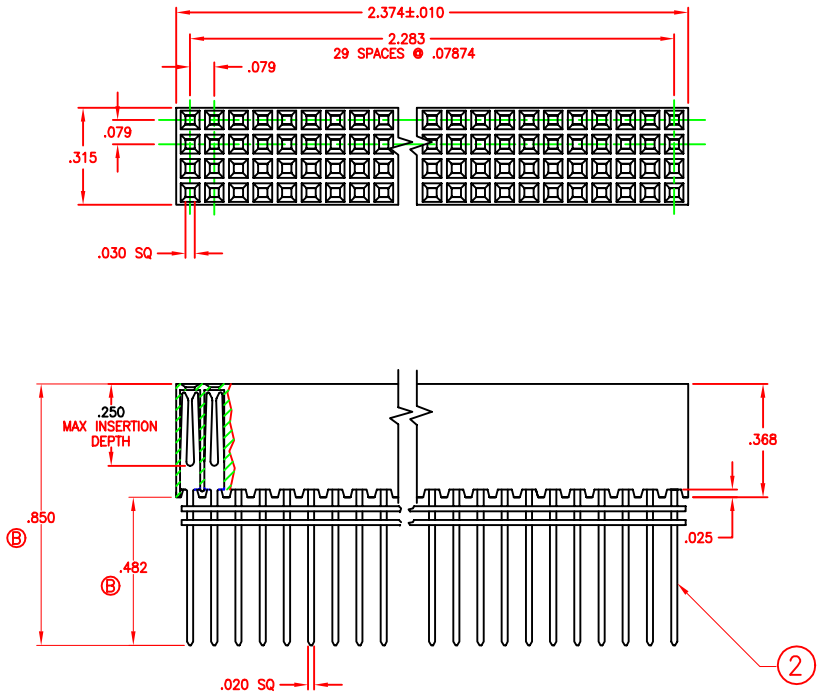

1. CONTACT MATERIAL:
   PHOSPHOR BRONZE, ALLOY 51000
2. INSULATOR MATERIAL:
   BLACK, 30% GLASS FILLED THERMOPLASTIC, 94V-0 RATED
   OPERATING TEMP RANGE: -65°C TO +250°C
   XYDAR LCP RESIN: G-930. RoHS COMPLIANT

3. CONTACT PLATING:
   G GOLD FLASH 3 TO 5 MICROINCHES PER MIL-G-45204 TYPE II
   OVER 50 MICROINCHES OF NICKEL PER QQ-N-290

NOTES: UNLESS OTHERWISE SPECIFIED

FIND	QTY	PART NO.	DESCRIPTION
3	2	40XXX	SOLDER PREFORM
2	120	P40287-02	CONTACT, .020 SQ.
1	1	40343	INSOLATOR, 2MM, 4 ROW

LIST OF MATERIALS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND TOLERANCES ARE:
FRACTIONS ±1/64 DECIMALS .XX ± .02 .XXX ± .010 ANGLES ±1°

DRAWN BY: JAE DATE: 08.07.06
APPROVED: DATE:
MATERIAL: SEE NOTE 2
FINISH: SEE NOTE 1

COMM CON WORLDWIDE, INC.
a subsidiary of
INTERCONNECT SYSTEMS INC.

TITLE: 2MM P, 4 ROW STAMPED SOCKET
PC104PLUS W/SOLDER ARRAY

CAT. NO:
SIZE: A
DWG NO: 50808
REV:
SCALE: 1:1
DRAWING:XXXXX
SHEET 1 OF 1