

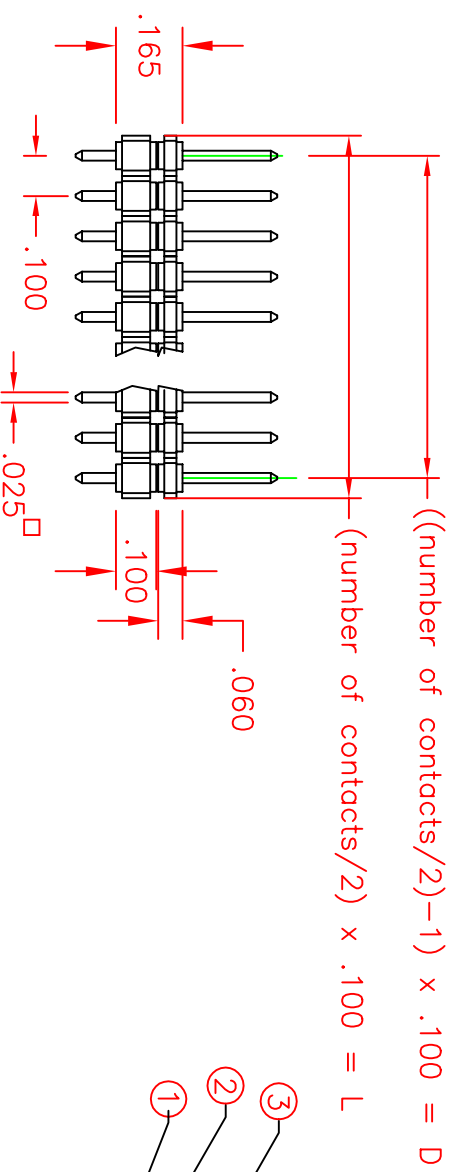


THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND IS THE PROPERTY OF INTERCONNECT SYSTEMS, INC. IT IS TO BE USED FOR THE MANUFACTURE OF THE PRODUCTS SPECIFICALLY AUTHORIZED IN WRITING BY INTERCONNECT SYSTEMS, INC. ANY REPRODUCTION OR DISSEMINATION OF THIS DRAWING WITHOUT THE WRITTEN PERMISSION OF INTERCONNECT SYSTEMS, INC. IS STRICTLY PROHIBITED.

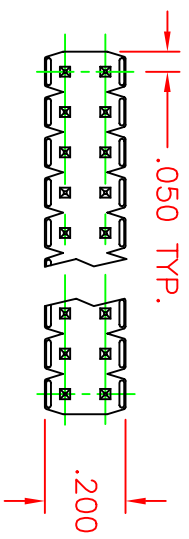

PART NO:	'D'	'L'	NO. OF CONTACTS
DH2-235/165/100-			
64G2LF	3.100	3.200	64
40G2LF	1.900	2.000	40

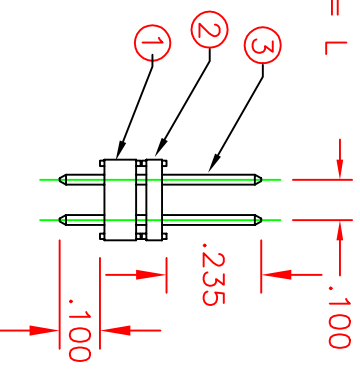

2. FINISH: G2LF - GOLD PLATE PER MIL-G-45204, TYPEII, .000010 MIN. ON ENGAGEMENT END, PURE TIN PLATE PER MIL-T-10727, .000150 MIN. ON TERMINATION END OVER NICKEL PLATE PER QQ-N-290, .000050 MIN.

1. MATERIALS: CONTACTS - PHOS/BRONZE PER C51000. INSULATOR - THERMOPLASTIC, 94V-0, BLK. RATED -65°C TO 250°C., ROHS COMPLIANT

NOTES: UNLESS OTHERWISE SPECIFIED

REVISIONS				
ECO NO:	REV:	DESCRIPTION	DATE	APPROVED
			07.12.06	

QTY	PART NO.	DESCRIPTION
3	A/R CCP15-24-500	.025 SQ. PIN, .500 LENGTH
2	40192	2 ROW INSULATOR, .100PITCH
1	40114	2 ROW INSULATOR, .100PITCH

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ±1/64 .XXX ±.010 ±1°

LIST OF MATERIALS

COMM CON WORLDWIDE, INC. a subsidiary of INTERCONNECT SYSTEMS INC.

DRAWN BY: AM	DATE: 4.30.01	CAT. NO:	SIZE: DWG NO:	REV:
APPROVED:	DATE:	DH2-....	A DH2-235/165/100-XXG2	*
FINISH: SEE NOTE 2	SCALE: 1:1	TOOL NO:	SHEET 1 OF 1	