


.100	HDD	40 Female + 4 Female Power - for Maxtor	Straight	for Maxtor
------	-----	---	----------	------------

ATA Disk Drive Combo Conn: 40 Female + 4 Female Power – Straight - for Maxtor

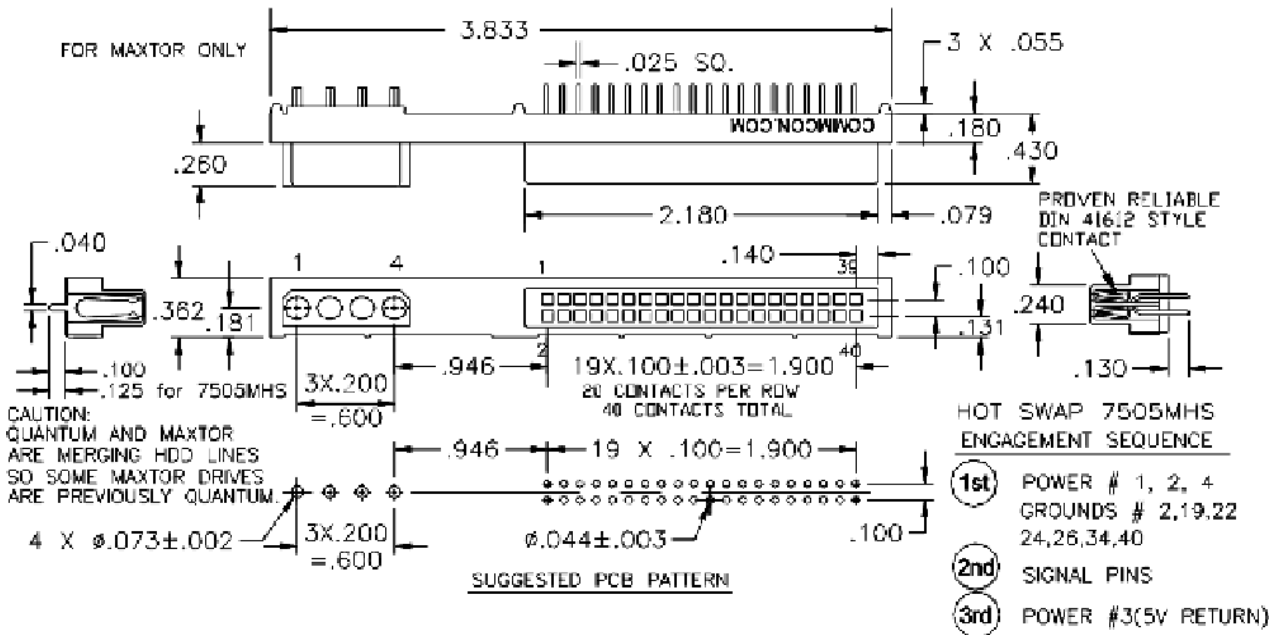

Base Part Number	A		B		C		D		E		Plating Options	Number of Postions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
7505M For Maxtor	97.36	3.833	3.18	0.125	3.30	0.130					X	One Per
7505MHS Hot Swap	97.36	3.833	3.18	0.125	3.30	0.130					X	One Per
7503M for Maxtor	97.36	3.833	2.54	0.100	3.30	0.130					X	One Per

Technical Notes	
Mates with Drives from:	Original Maxtor version (previous Quantum drives will not mate)
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Insulation Resistance:	5000 MegOhm @ 500VDC
Plating:	Power = tin : Signal = G2LF (gold/ tin)
Max Processing Temp:	250°C for 60 seconds
Insertion Force:	11 pounds (5.0 kg) total
Extraction Force:	6.8 pounds (3.0 kg) total
Plastic:	High Temperature Plastic
INTERCONNECT SYSTEMS INC.	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com	