


.100	HDD	40 + 4 Female HD connector - surface mount - WD	Surface Mount	WD
------	-----	---	---------------	----

ATA Disk Drive Combo Conn: 40 Female + 4 Female Power – Surface Mount – for WD

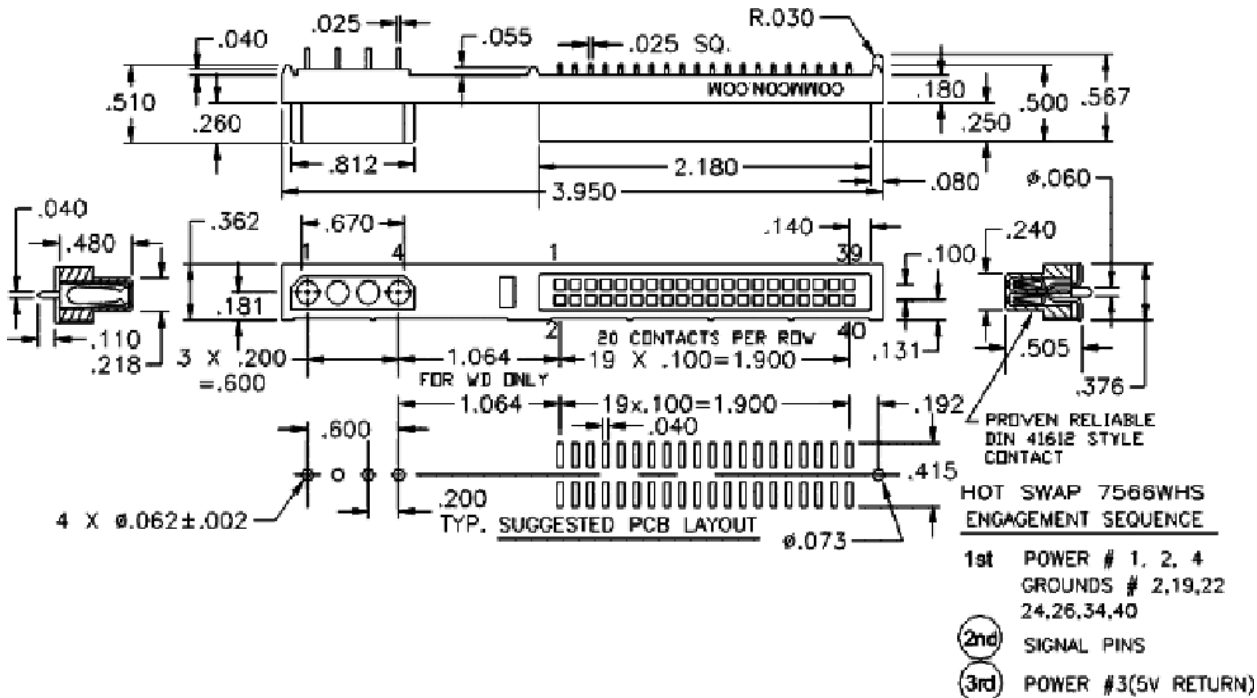

Base Part Number	A		B		C		D		E		Plating Options	Number of Postions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
7566W for WD											X	One Per

Technical Notes	
<b>Mates with Drives from:</b>	Western Digital
<b>Insulation Material:</b>	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Plating:</b>	Power = tin : Signal = G2LF (gold/ tin)
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Insertion Force:</b>	11 pounds (5.0 kg) total
<b>Extraction Force:</b>	6.8 pounds (3.0 kg) total
<b>Plastic:</b>	High Temperature Plastic

**INTERCONNECT SYSTEMS INC.**  
 741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: [info@isipkg.com](mailto:info@isipkg.com)