


| | | | | |
|------|-----|--|----------------|-----------------------------|
| .100 | HDD | 40 signal + shunts + 4 power - for Spec 1 connectors | Straddle Mount | Fujitsu - Seagate - Quantum |
|------|-----|--|----------------|-----------------------------|

ATA HDD Conn: 40 Signal + 8 shunt + 4 Power - Straddle Mount - for Fujitsu / Seagate / IBM / Quantum

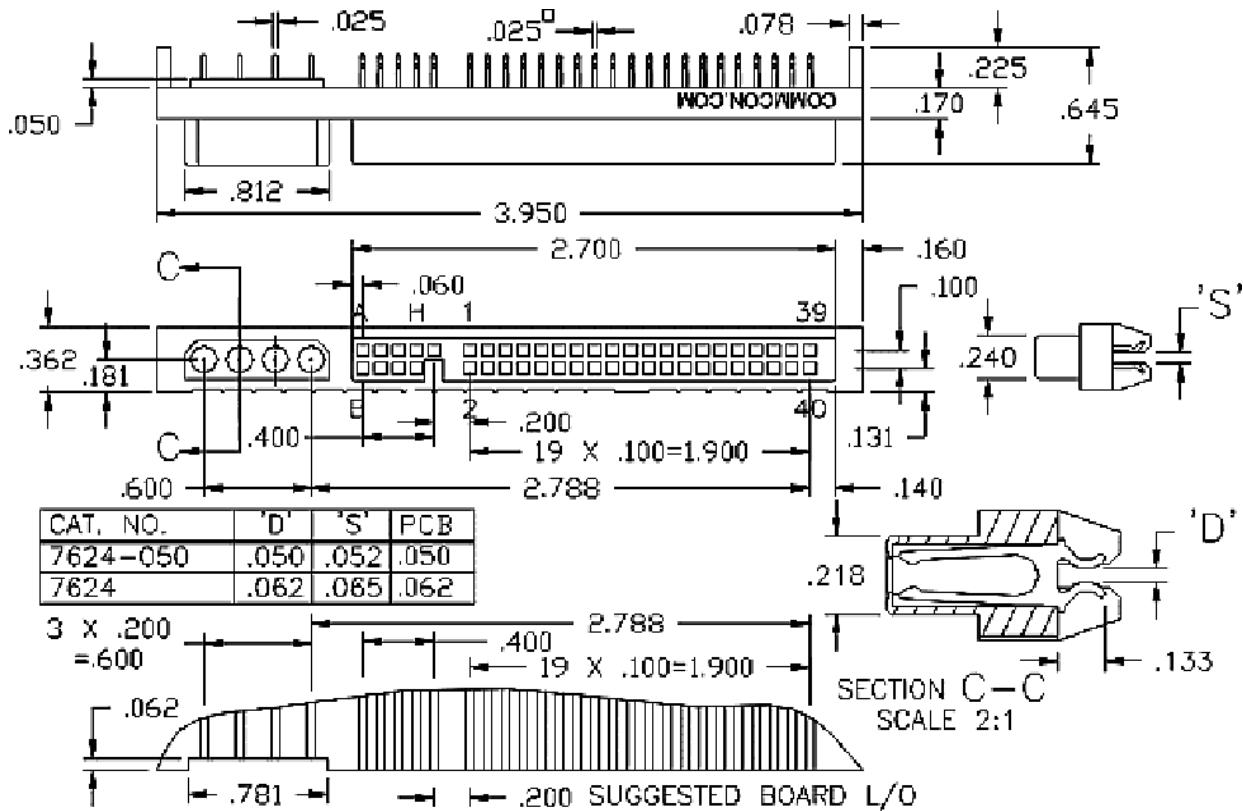

| Base Part Number | A | | B | | C | | D | | E | | Plating Options | Number of Positions |
|---------------------------|----|------|----|------|----|------|----|------|----|------|-----------------|---------------------|
| | mm | Inch | mm | Inch | mm | Inch | mm | Inch | mm | Inch | | |
| 7624 For Spec 1 | | | | | | | | | | | X | One Per |

| Technical Notes | |
|--|--|
| Mates with Drives from: | Fujitsu - Seagate - IBM newer Quantum |
| Insulation Material: | Glass Filled Nylon 46 - UL 94V-0 rated - Black (std) |
| Insulation Resistance: | 5000 MegOhm @ 500VDC |
| Plating: | Power = tin : Signal = G2LF (gold/ tin) |
| Max Processing Temp: | 250°C for 60 seconds |
| Insertion Force: | 11 pounds (5.0 kg) total |
| Extraction Force: | 6.8 pounds (3.0 kg) total |
| Plastic: | High Temperature Plastic |
| INTERCONNECT SYSTEMS INC. | |
| 741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com | |