


.050	Header	Single Row - .016 Sq. Pin	Straight	Thru Hole
------	--------	---------------------------	----------	-----------

.050" Center, .016" Square Pin, Single Row Straight Header

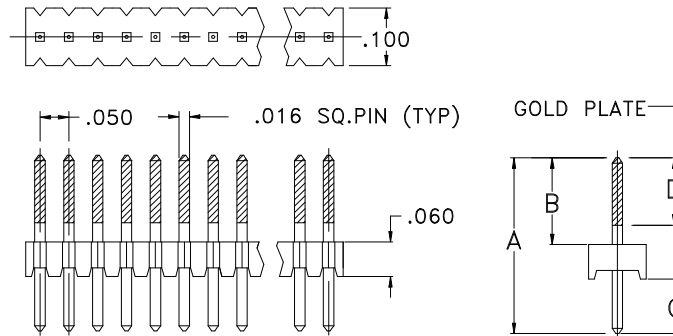

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
3314	6.35	0.250	2.54	0.100	2.29	0.090	2.54	0.100			G2LF : TLF	2-60
3310	7.62	0.300	3.30	0.130	2.79	0.110	3.30	0.130			G2LF : TLF	2-60
3311	7.62	0.300	3.68	0.145	2.41	0.095	3.43	0.135			G2LF : TLF	2-60
3322	8.38	0.330	3.05	0.120	2.29	0.090	3.05	0.120			G2LF : TLF	2-60
3312	8.89	0.350	4.70	0.185	2.67	0.105	3.43	0.135			G2LF : TLF	2-60
3313	10.16	0.400	5.84	0.230	2.79	0.110	3.43	0.135			G2LF : TLF	2-60
3318	11.05	0.435	6.73	0.265	2.79	0.110	3.43	0.135			G2LF : TLF	2-60
3315	13.59	0.535	9.27	0.365	2.79	0.110	3.43	0.135			G2LF : TLF	2-60
3316	16.13	0.635	11.81	0.465	2.79	0.110	3.43	0.135			G2LF : TLF	2-60
3317	18.67	0.735	14.35	0.565	2.79	0.110	3.43	0.135			G2LF : TLF	2-60
3319	21.21	0.835	3.68	0.145	16.00	0.630	3.43	0.135			G2LF : TLF	2-60
3320	23.75	0.935	3.68	0.145	18.54	0.730	3.43	0.135			G2LF : TLF	2-60
3321	26.29	1.035	3.05	0.120	21.72	0.855	3.43	0.135			G2LF : TLF	2-60

Technical Notes	
<b>Contact Material:</b>	Pin: Phosphor Bronze - .016"sq pin, drawn wire, burr free both ends
<b>Insulation Material:</b>	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
<b>Heat Deflection:</b>	260°C @ 264 PSI per ASTM D648
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Current Rating:</b>	1 amps continuous @ 100 VDC/contact
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Plastic:</b>	High Temperature Plastic
<b>INTERCONNECT SYSTEMS INC.</b>	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: <a href="mailto:info@isipkg.com">info@isipkg.com</a>	