


.050	Header	Single Row - .016 Low Profile	Rt Angle	Thru Hole
------	--------	-------------------------------	----------	-----------

.050" Center, .016" Square Pin, Low Profile - Single Row Right Angle Header

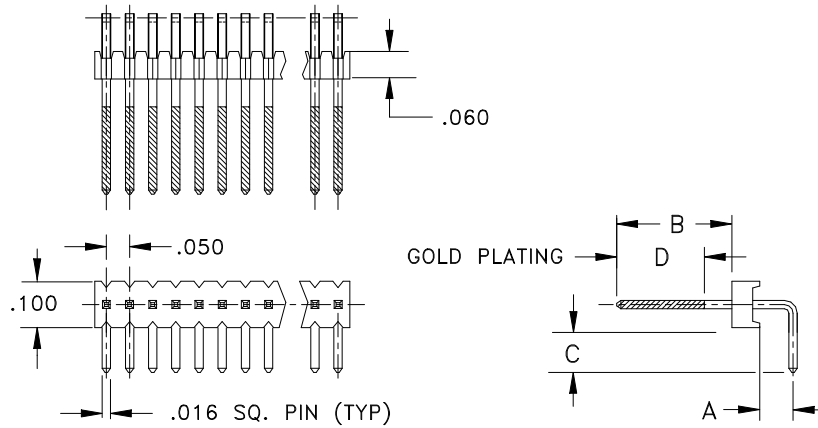

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
3403R	1.52	0.060	2.54	0.100	2.29	0.090	2.54	0.100			G2LF : TLF	1-60
3404R	1.52	0.060	3.81	0.150	2.29	0.090	3.68	0.145			G2LF : TLF	1-60
3405R	1.52	0.060	1.65	0.065	1.40	0.055	1.65	0.065			G2LF : TLF	1-60
3406R	1.52	0.060	4.70	0.185	2.29	0.090	3.68	0.145			G2LF : TLF	1-60

Technical Notes	
<b>Contact Material:</b>	Pin: Phosphor Bronze - .016"sq. pin, drawn wire, burr free both ends
<b>Insulation Material:</b>	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
<b>Heat Deflection:</b>	260°C @ 264 PSI per ASTM D648
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Current Rating:</b>	1 amps continuous @ 100 VDC/contact
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Plastic:</b>	High Temperature Plastic
<b>INTERCONNECT SYSTEMS INC.</b>	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: <a href="mailto:info@isipkg.com">info@isipkg.com</a>	