


| | | | | |
|------|--------|---------------------------|----------|-----------|
| .050 | Header | Double Row - .016 Sq. Pin | Straight | Thru Hole |
|------|--------|---------------------------|----------|-----------|

.050" Center, .016" Square Pin, Double Row Straight Header

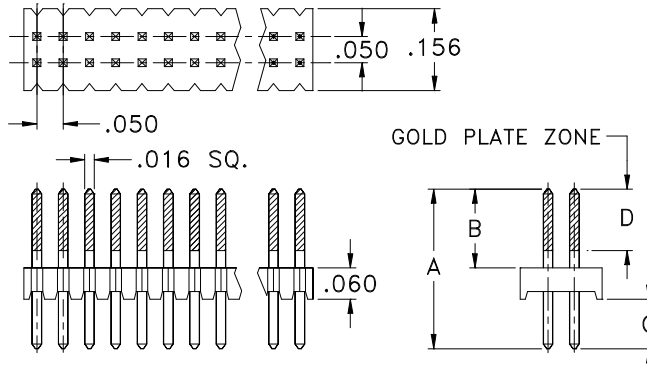

| Base Part Number | A | | B | | C | | D | | E | | Plating Options | Number of Positions |
|------------------|-------|-------|-------|-------|-------|-------|------|-------|----|------|-----------------|---------------------|
| | mm | Inch | mm | Inch | mm | Inch | mm | Inch | mm | Inch | | |
| 3914 | 6.35 | 0.250 | 2.54 | 0.100 | 2.29 | 0.090 | 2.54 | 0.100 | | | G2LF : TLF | 4-120 |
| 3910 | 7.62 | 0.300 | 3.30 | 0.130 | 2.79 | 0.110 | 3.30 | 0.130 | | | G2LF : TLF | 4-120 |
| 3911 | 7.62 | 0.300 | 3.68 | 0.145 | 2.41 | 0.095 | 3.43 | 0.135 | | | G2LF : TLF | 4-120 |
| 3922 | 8.38 | 0.330 | 3.05 | 0.120 | 2.29 | 0.090 | 3.05 | 0.120 | | | G2LF : TLF | 4-120 |
| 3912 | 8.89 | 0.350 | 4.70 | 0.185 | 2.67 | 0.105 | 3.43 | 0.135 | | | G2LF : TLF | 4-120 |
| 3913 | 10.16 | 0.400 | 5.84 | 0.230 | 2.79 | 0.110 | 3.43 | 0.135 | | | G2LF : TLF | 4-120 |
| 3918 | 11.05 | 0.435 | 6.73 | 0.265 | 2.79 | 0.110 | 3.43 | 0.135 | | | G2LF : TLF | 4-120 |
| 3915 | 13.59 | 0.535 | 9.27 | 0.365 | 2.79 | 0.110 | 3.43 | 0.135 | | | G2LF : TLF | 4-120 |
| 3916 | 16.13 | 0.635 | 11.81 | 0.465 | 2.79 | 0.110 | 3.43 | 0.135 | | | G2LF : TLF | 4-120 |
| 3917 | 18.67 | 0.735 | 14.35 | 0.565 | 2.79 | 0.110 | 3.43 | 0.135 | | | G2LF : TLF | 4-120 |
| 3919 | 21.21 | 0.835 | 3.68 | 0.145 | 16.00 | 0.630 | 3.43 | 0.135 | | | G2LF : TLF | 4-120 |
| 3920 | 23.75 | 0.935 | 3.68 | 0.145 | 18.54 | 0.730 | 3.43 | 0.135 | | | G2LF : TLF | 4-120 |
| 3921 | 26.29 | 1.035 | 3.05 | 0.120 | 21.72 | 0.855 | 3.43 | 0.135 | | | G2LF : TLF | 4-120 |

| Technical Notes | |
|--|---|
| Contact Material: | Pin: Phosphor Bronze - .016"sq pin, drawn wire, burr free both ends |
| Insulation Material: | Glass Filled Nylon 46 - UL 94V-0 rated - Black (std) |
| Heat Deflection: | 260°C @ 264 PSI per ASTM D648 |
| Insulation Resistance: | 5000 MegOhm @ 500VDC |
| Current Rating: | 1 amps continuous @ 100 VDC/contact |
| Max Processing Temp: | 250°C for 60 seconds |
| Plastic: | High Temperature Plastic |
| INTERCONNECT SYSTEMS INC. | |
| 741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com | |