


.050	Header	Double Row - .018 Round Pin	Straight	Thru Hole
------	--------	-----------------------------	----------	-----------

.050" Center, .018" Dia Round Pin, Double Row Straight Header

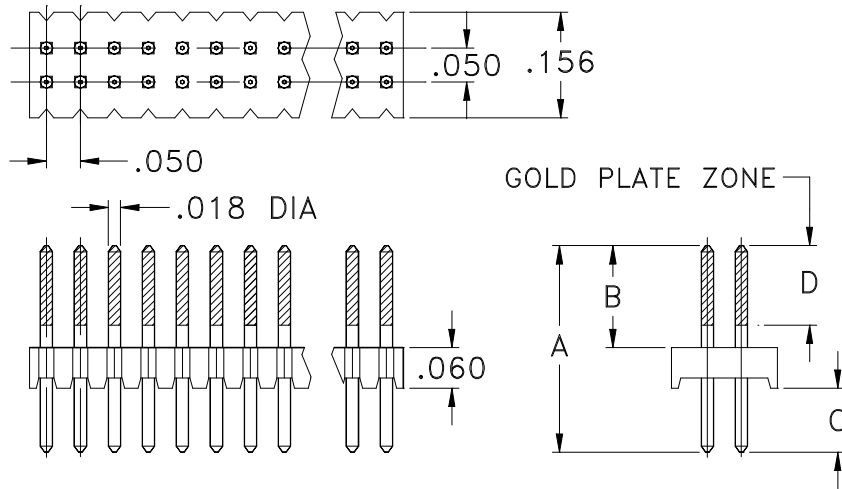

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
3954	6.35	0.250	2.41	0.095	2.41	0.095					TLF	4-120
3953	6.35	0.250	3.81	0.150	1.02	0.040	3.81	0.150			G2LF : TLF	4-120
3952	8.76	0.345	3.81	0.150	3.43	0.135	3.30	0.130			G2LF : TLF	4-120
3950	8.89	0.350	4.19	0.165	3.18	0.125	3.81	0.150			G2LF : TLF	4-120
3951	10.41	0.410	5.84	0.230	3.05	0.120	5.84	0.230			G2LF : TLF	4-120
3955	12.70	0.500	5.84	0.230	5.33	0.210	5.84	0.230			G2LF : TLF	4-120
3957	16.26	0.640	12.45	0.490	2.29	0.090	3.68	0.145			G2LF : TLF	4-120
3958	21.59	0.850	17.78	0.700	2.29	0.090	3.68	0.145			G2LF : TLF	4-120
3956	23.75	0.935	3.68	0.145	18.54	0.730	3.81	0.150			G2LF : TLF	4-120
3959	28.58	1.125	24.76	0.975	2.29	0.090	3.68	0.145			G2LF : TLF	4-120

Technical Notes	
<b>Contact Material:</b>	Pin: Phosphor Bronze - .018" dia. pin, drawn wire, burr free both
<b>Insulation Material:</b>	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
<b>Heat Deflection:</b>	260°C @ 264 PSI per ASTM D648
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Current Rating:</b>	1 amps continuous @ 100 VDC/contact
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Plastic:</b>	High Temperature Plastic
<b>INTERCONNECT SYSTEMS INC.</b>	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: <a href="mailto:info@isipkg.com">info@isipkg.com</a>	