


2mm	Header	Double Row - Box	Straight	Thru hole
-----	--------	------------------	----------	-----------

2mm Center - .020" Square Pin, Box, Double Row Straight Header

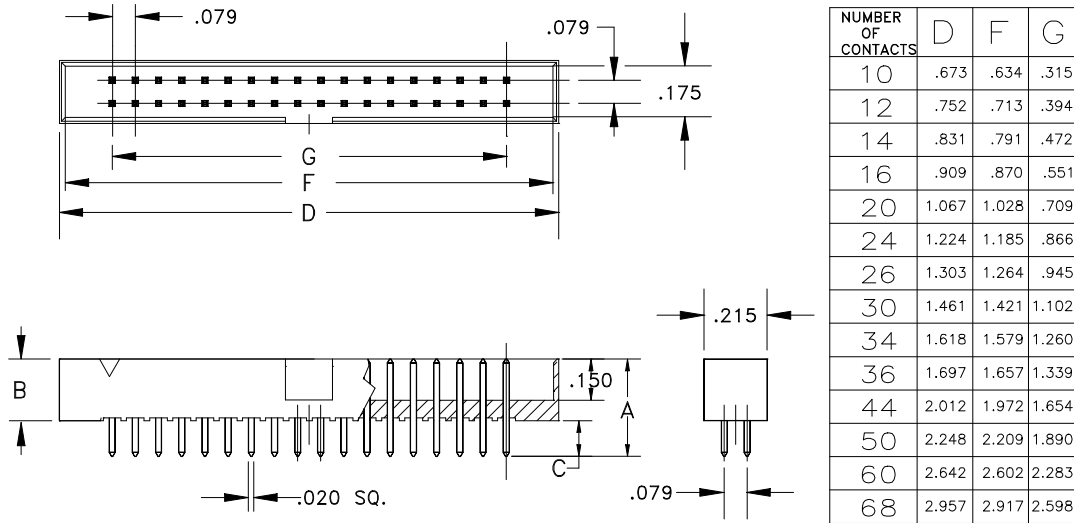

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
2422	8.13	0.320	5.59	0.220	2.54	0.100					G2LF : TLF	See dwg
2423	9.78	0.385	5.59	0.220	4.19	0.165					G2LF : TLF	See dwg

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .020"sq pin, burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	2 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
INTERCONNECT SYSTEMS INC.	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com	