


.100	Header	Double Row - Low Profile	Rt Angle	Thru Hole
-------------	---------------	---------------------------------	-----------------	------------------

.100 inch Center - .025 inch Square Pin - Low Profile - Double Row Right Angle Header

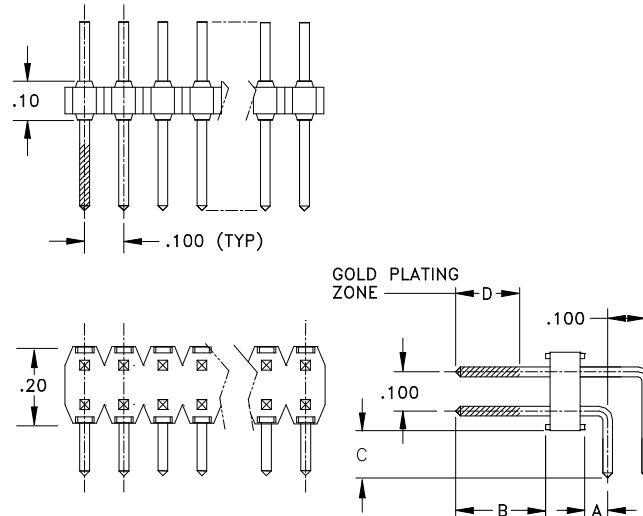

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
4723R	1.52	0.060	8.08	0.318	5.84	0.230	5.84	0.230			G2LF : G1 : TLF	4-80
4712R	1.52	0.060	5.84	0.230	8.13	0.320	5.84	0.230			G2LF : G1 : TLF	4-80
4707R	1.52	0.060	5.84	0.230	10.67	0.420	5.84	0.230			G2LF : G1 : TLF	4-80
4714R	1.52	0.060	5.84	0.230	13.21	0.520	5.84	0.230			G2LF : G1 : TLF	4-80
4705R	1.52	0.060	8.08	0.318	3.30	0.130	5.84	0.230			G2LF : G1 : TLF	4-80
4717R	1.52	0.060	5.84	0.230	15.75	0.620	5.84	0.230			G2LF : G1 : TLF	4-80
4704R	1.52	0.060	5.84	0.230	5.59	0.220	5.84	0.230			G2LF : G1 : TLF	4-80
4701R	1.52	0.060	5.84	0.230	3.05	0.120	5.84	0.230			G2LF : G1 : TLF	4-80
4719R	4.06	0.160	5.84	0.230	3.05	0.120	5.84	0.230			G2LF : G1 : TLF	4-80
4703R	4.06	0.160	5.84	0.230	5.59	0.220	5.84	0.230			G2LF : G1 : TLF	4-80
4709R	4.06	0.160	5.84	0.230	13.21	0.520	5.84	0.230			G2LF : G1 : TLF	4-80

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .025 inch sq pin - burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	3 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
<i>INTERCONNECT SYSTEMS INC.</i> 741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com	