


1mm	Jumper	Multile Shunt	Insulated	microshunt
-----	--------	---------------	-----------	------------

1mm Center Microshunt Closed Top Multiple Jumper

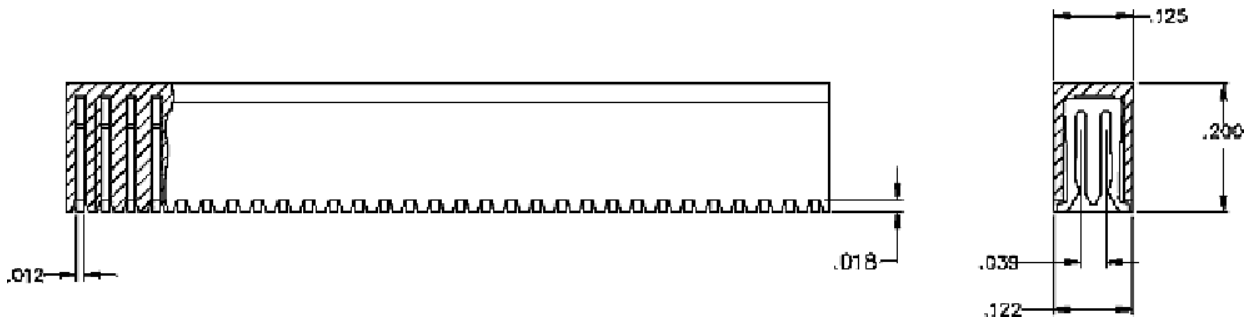

Base Part Number	A		B		C		D		E		Plating Options	Number of Postions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
MAIJ1MM-03 Closed Top 3 pos.											G : TLF	CLOSED TOP
MAIJ1MM-04 Closed Top 4 pos.											G : TLF	CLOSED TOP
MAIJ1MM-05 Closed Top 5 pos.											G : TLF	CLOSED TOP
MAIJ1MM-06 Closed Top 6 pos.											G : TLF	CLOSED TOP
MAIJ1MM-07 Closed Top 7 pos.											G : TLF	CLOSED TOP
MAIJ1MM-08 Closed Top 8 pos.											G : TLF	CLOSED TOP
MAIJ1MM-09 Closed Top 9 pos.											G : TLF	CLOSED TOP
MAIJ1MM-10 Closed Top 10 pos.											G : TLF	CLOSED TOP
MAIJ1MM-02 Closed Top 2 pos.											G : TLF	CLOSED TOP
MAIJ1MM-11 Closed Top 1 pos.											G : TLF	CLOSED TOP
MAIJ1MM-20 Closed Top 20 pos.											G : TLF	CLOSED TOP
MAIJ1MM-12 Closed Top 12 pos.											G : TLF	CLOSED TOP
MAIJ1MM-13 Closed Top 13 pos.											G : TLF	CLOSED TOP
MAIJ1MM-14 Closed Top 14 pos.											G : TLF	CLOSED TOP
MAIJ1MM-15 Closed Top 15 pos.											G : TLF	CLOSED TOP
MAIJ1MM-16 Closed Top 16 pos.											G : TLF	CLOSED TOP
MAIJ1MM-17 Closed Top 17 pos.											G : TLF	CLOSED TOP
MAIJ1MM-18 Closed Top 18 pos.											G : TLF	CLOSED TOP
MAIJ1MM-19 Closed Top 19 pos.											G : TLF	CLOSED TOP

+

Technical Notes	
Contact Material:	Contact: Stamped - BeCu
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	1 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Insertion Force:	75 grams(2.6oz)(typ initial w/ .012”sq pin)
Extraction Force:	49 grams(1.7oz)(typ initial w/ .012”sq pin)
Plastic:	High Temperature Plastic
<p><i>INTERCONNECT SYSTEMS INC.</i> 741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail:info@isipkg.com</p>	