



2mm	Jumper	Single Shunt	Insulated	
-----	--------	--------------	-----------	--

2mm Center, Microshunt, Open & Closed Top, Single Jumper

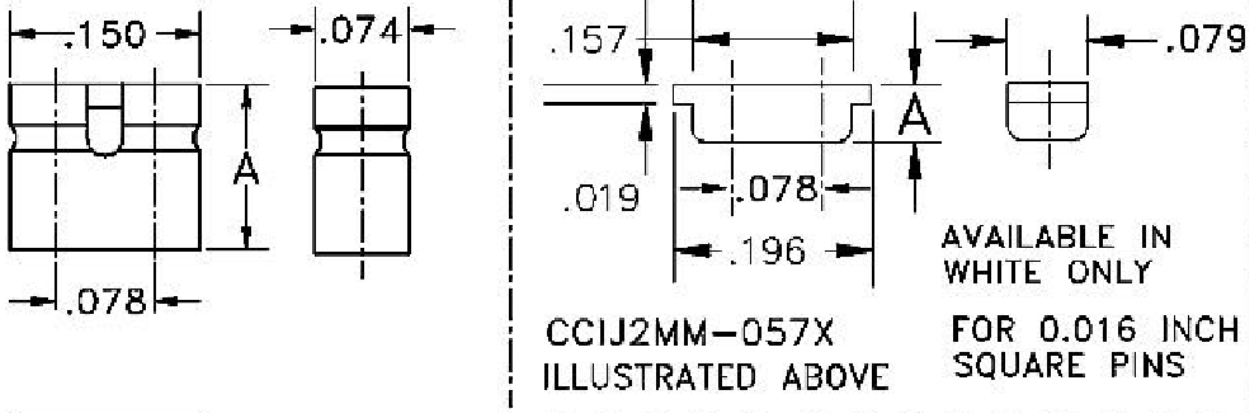

CT = CLOSED TOP



CC = OPEN TOP

Base Part Number	A		B		C		D		E		Plating Options	Number of Postions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
CTIJ2MM-195 Closed Top	4.95	0.195									G : TLF	CLOSED TOP
CCIJ2MM-057 For .016" sq pin	1.45	0.057									G : TLF	OPEN TOP
CCIJ2MM-138 Open Top	3.51	0.138									G : TLF	OPEN TOP
CCIJ2MM-175 Open Top	4.44	0.175									G : TLF	OPEN TOP

+

Technical Notes	
<b>Contact Material:</b>	Contact: Phosphor Bronze
<b>Insulation Material:</b>	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Current Rating:</b>	1 amps continuous @ 100 VDC/contact
<b>Max Processing Temp:</b>	105°C for 60 seconds
<b>Insertion Force:</b>	200 grams(7.0oz)(typ initial w/ .020"sq pin)
<b>Extraction Force:</b>	120 grams(4.2oz)(typ initial w/ .020"sq pin)
<b>INTERCONNECT SYSTEMS INC.</b>	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: <a href="mailto:info@isipkg.com">info@isipkg.com</a>	