


.050	Header	Industry Pack Module w locating pins	Male	Surface Mount
-------------	---------------	---	-------------	----------------------

Industry Pack Mezzaine Connector, Male used on Carrier Board, Surface Mount

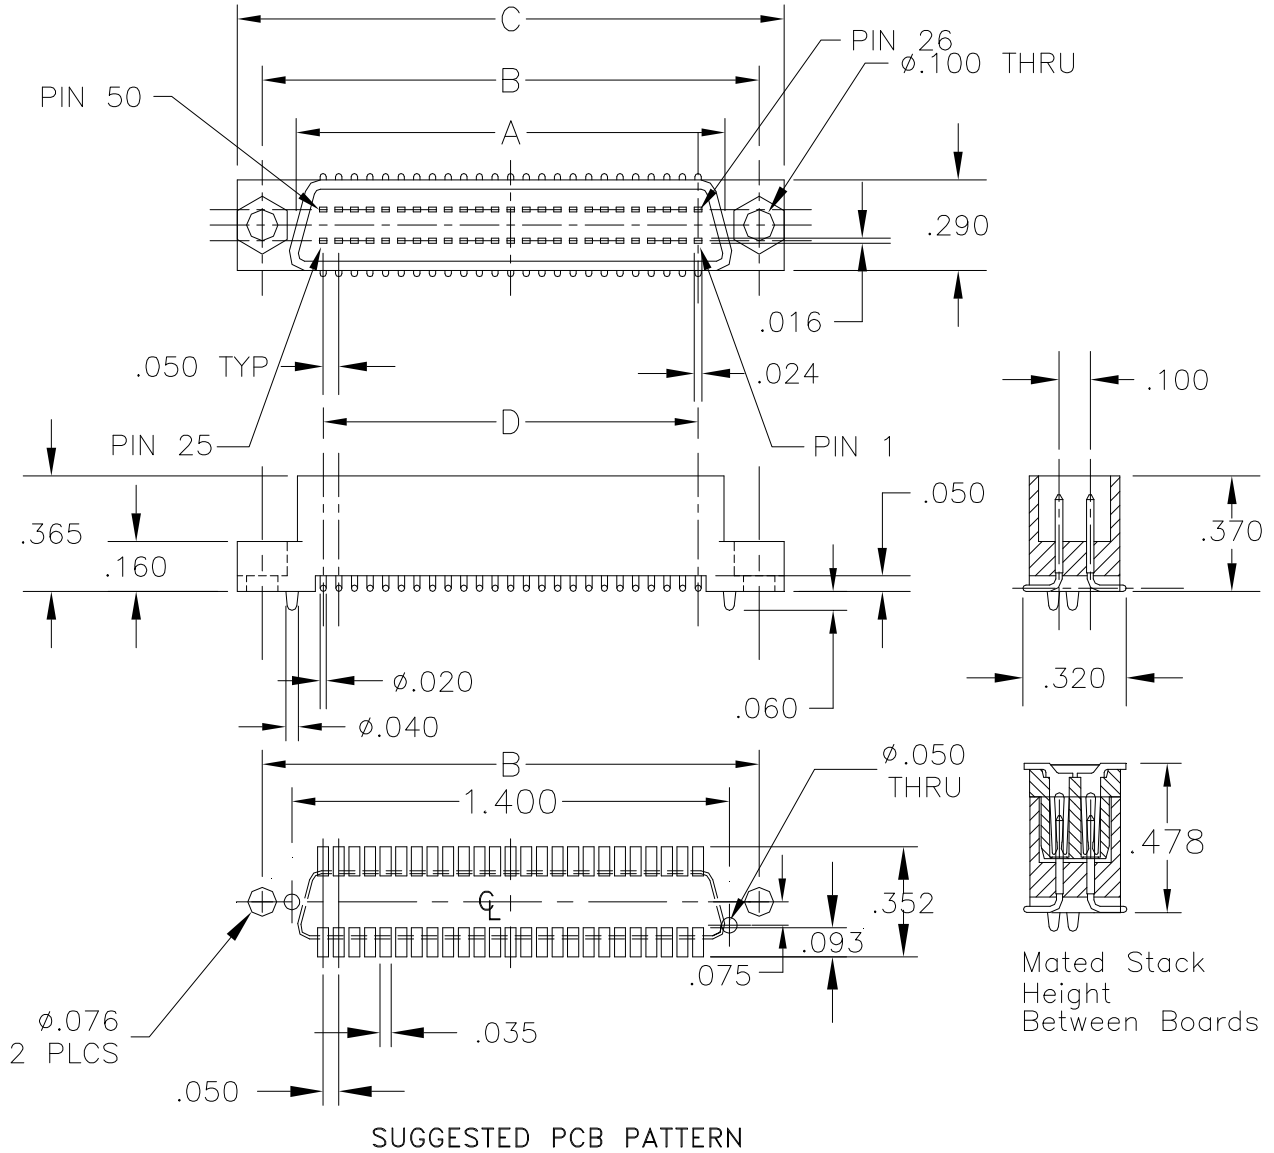

Base Part Number	A		B		C		D		E		Plating Options	Number of Postions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
8062 IP Module	34.85	1.372	40.39	1.590	44.45	1.750	30.48	1.200			G2LF	50

Technical Notes	
Contact Material:	Pin: Phosphor Bronze, .016"x.024" burr free
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	1 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
<p><i>INTERCONNECT SYSTEMS INC.</i> 741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com</p>	