


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	07/28/06	H.N.

SKT1783

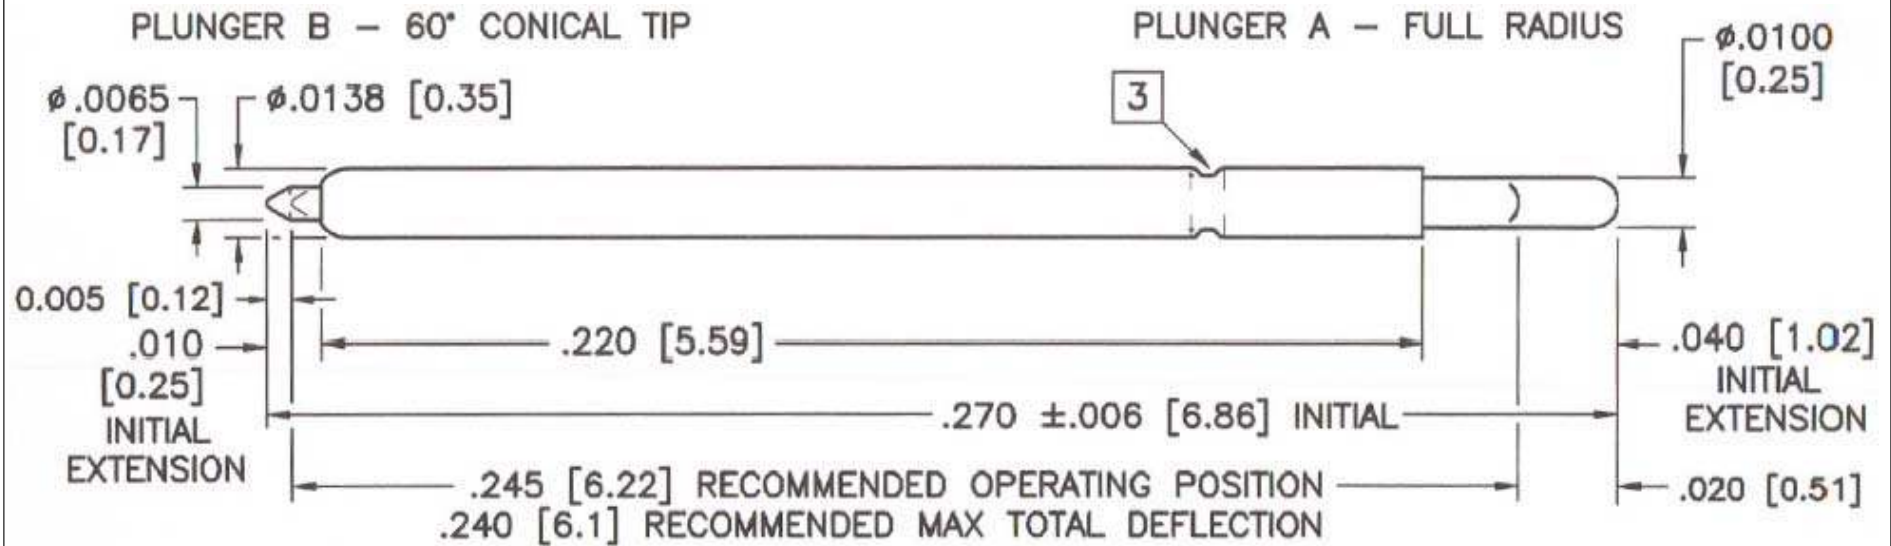

BURN-IN CONTACT B1545-J9 / 90843

PLUNGER A - HARDENED BeCu  
FINISH - GOLD-PLATED  
B1601-11-G / 11959

PLUNGER B - HARDENED BeCu  
FINISH - GOLD-PLATED  
B1472-42-G / 11404

BARREL - COPPER ALLOY  
FINISH - GOLD-PLATED  
B1545-12-G / 11315

SPRING - STAINLESS STEEL  
FINISH - GOLD-PLATED  
B1545-33-G / 11317

NOTES

- 1 DIMENSIONS ARE INCHES [MM REF]
- 2 FORCE - 8 GRAMS (0.28 OZ) INITIAL  
20 GRAMS (0.7 OZ) AT .245 OPERATING POSITION
- 3 INDENT FORM - EITHER 4 WAY CONICAL INDENT OR ROLL CRIMP (AS SHOWN)
- 4 OPERATING TEMPERATURE RANGE -  
-42°C TO +135°C



Emulation Technology, Inc.

— VLSI and SMT ADAPTERS and ACCESSORIES —

2344 Walsh Avenue, Bldg.F Santa Clara, Ca 95051  
TEL:(408)982-0660 FAX:(408)982-0664

SHEET: 1 OF 1	DATE: 07/28/06	REVISION: A	ASSEMBLY DRAWING
CHECKED: Perry Munroe	DRAWN: Huy Nguyen	ITEM: POGO-PIN-6.86-1	DESCRIPTION: POGO-PIN-6.86-1
Scale N/A	DO NOT SCALE DRAWING		