


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	04/12/04	H.N.
B	ADDED TOLERANCES	02/11/10	JAG

SKT1988
DOD 41988

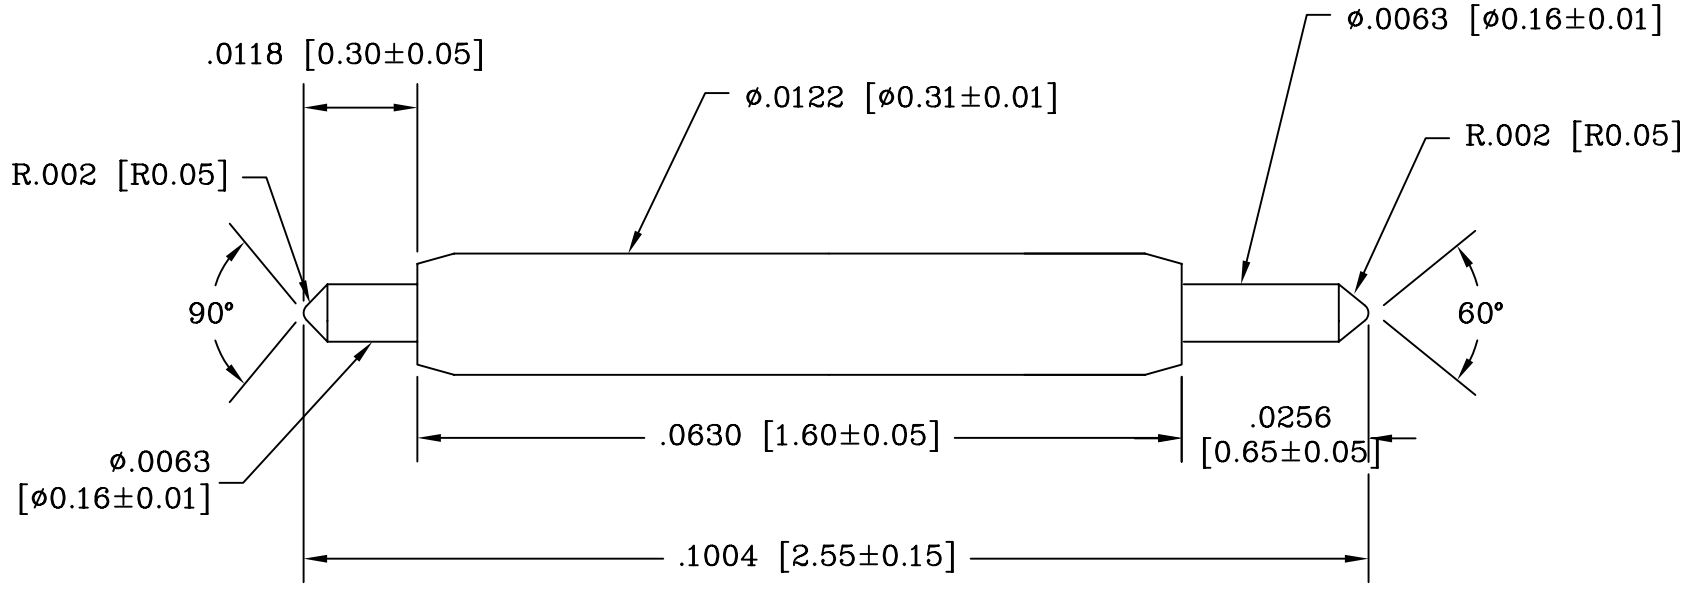


POINTING ACCURACY: ± 0.05 mm

SPRING FORCE [$\pm 20\%$]
 3.8g(0.134oz) AT INITIAL TRAVEL
 18.0g(0.635oz) AT 0.45mm(0.0177) RECOMMENDED TRAVEL
 22.0g(0.776oz) AT 0.60mm(0.0236) FULL TRAVEL

MATERIAL & FINISHES
 PLUNGER: HARDENED BERYLLIUM COPPER / GOLD PLATED
 BARREL: PHOSPHOR BRONZE / GOLD PLATED
 SPRING: MUSIC WIRE / GOLD PLATED

ALL DIMENSIONS ARE IN INCHES [MM] UNLESS OTHERWISE SPECIFIED



Emulation Technology, Inc.
 — VLSI and SMT ADAPTERS and ACCESSORIES —
 759 FLYNN ROAD
 CAMARILLO, CA 93012
 TEL:(805)383-8480
 FAX:(805)383-8484

SHEET: 1 OF 1	DATE: 04/12/04	REVISION: B	ASSEMBLY DRAWING
CHECKED: Perry Munroe	DRAWN: Huy Nguyen	ITEM: POGO-PIN-2.55-2	
Scale N/A	DO NOT SCALE DRAWING		DESCRIPTION: POGO-PIN-2.55-2