


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	12/28/12	TF

SKT3861

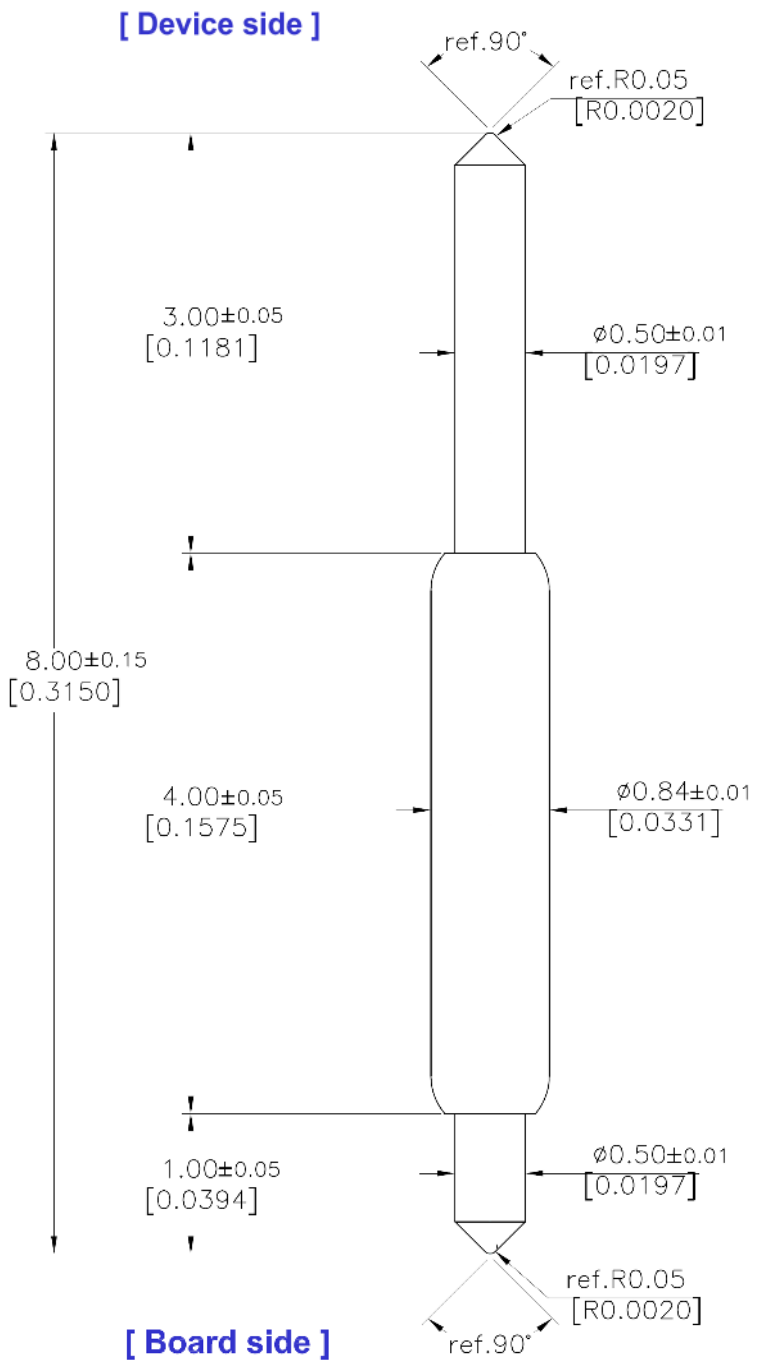

Pointing accuracy : ± 0.09 mm

Unit : Millimeter[inch]

Spring force [±20%]

- 15.5g(0.545oz) at initial travel
- 30.0g(1.058oz) at 0.80mm(0.0315) recommended travel
- 34.3g(1.211oz) at 1.05mm(0.0413) full travel

Material & Finish

Plunger [Device side]	Hardened Beryllium copper	/ Gold Plated
Plunger [Board side]	Hardened Beryllium copper	/ Gold Plated
Barrel	Phosphor Bronze	/ Gold Plated
Spring	Music Wire	/ Gold Plated

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED			
	EMULATION TECHNOLOGY, INC.		
	VLSI and SMT ADAPTERS and ACCESSORIES		
759 FLYNN ROAD		TEL: (805) 383-8480	
CAMARILLO, CA 93012		FAX: (805) 383-8484	
SHEET: 1 OF 1	DATE: 12/28/12	REVISION: A	ASSEMBLY DRAWING
CHECKED:	PREPARED BY: T. FOOTE	ITEM: POGO-PIN-8.00-1	
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-8.00-1