


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	07/09/13	JAG

SKT3947

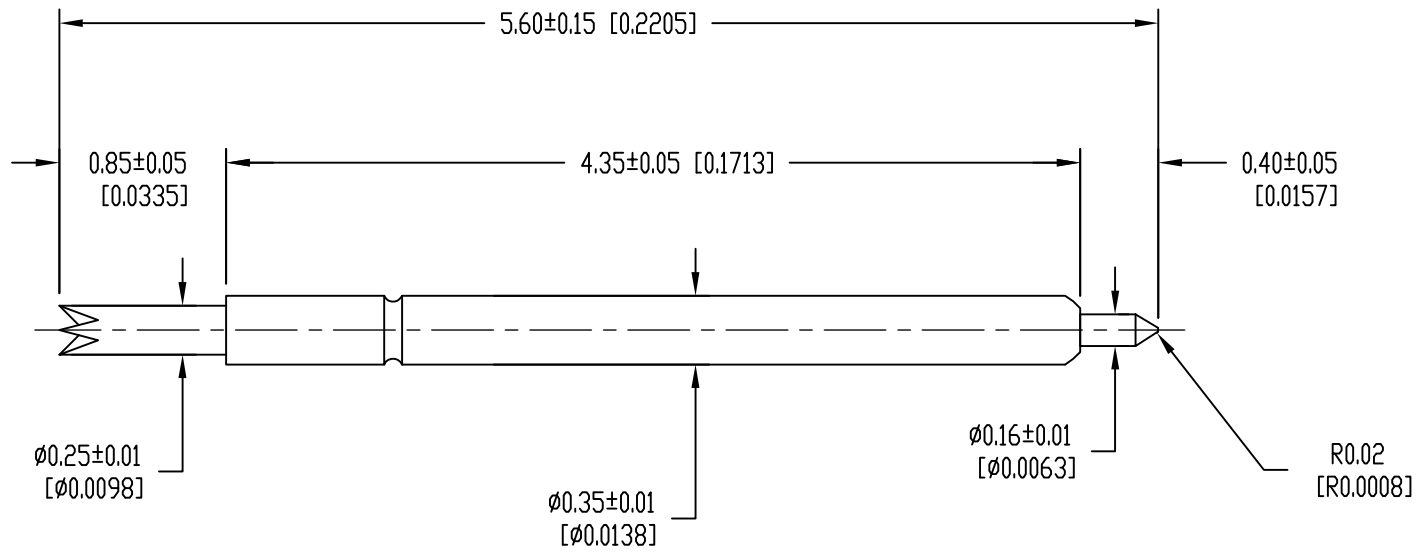

POINTING ACCURACY: ±0.03mm

SPRING FORCE
 7.0g (0.247oz) at INITIAL TRAVEL
 28.0g (0.988oz) at 0.64mm (0.0252) RECOMMENDED TRAVEL
 33.0g (1.164oz) at 0.80mm (0.0315) FULL TRAVEL

PART	MATERIAL	FINISH
PLUNGER	HARDENED STEEL	GOLD PLATED
BARREL	PHOSPHOR BRONZE	GOLD PLATED
SPRING	MUSIC WIRE	GOLD PLATED

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

EMULATION TECHNOLOGY, INC.
 — VLSI and SMT ADAPTERS and ACCESSORIES —
 759 FLYNN ROAD
 CAMARILLO, CA 93012

TEL: (805) 383-8480
 FAX: (805) 383-8484

SCALE 1:1

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN MILLIMETERS
 TOLERANCES ARE:
 DECIMALS: ANGULAR:
 X.X ±0.100MM X.X ±1.0°
 X.XX ±0.050MM X.XX ±0.5°
 X.XXX ±0.025MM

SHEET: 1 OF 1	DATE: 07/09/13	REVISION: A	ASSEMBLY DRAWING
CHECKED:	DRAWN: J. GELACIO	ITEM: POGO-PIN-5.60-1	
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-5.60-1