


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	6/18/14	TF

SKT4071

[ DEVICE SIDE ]

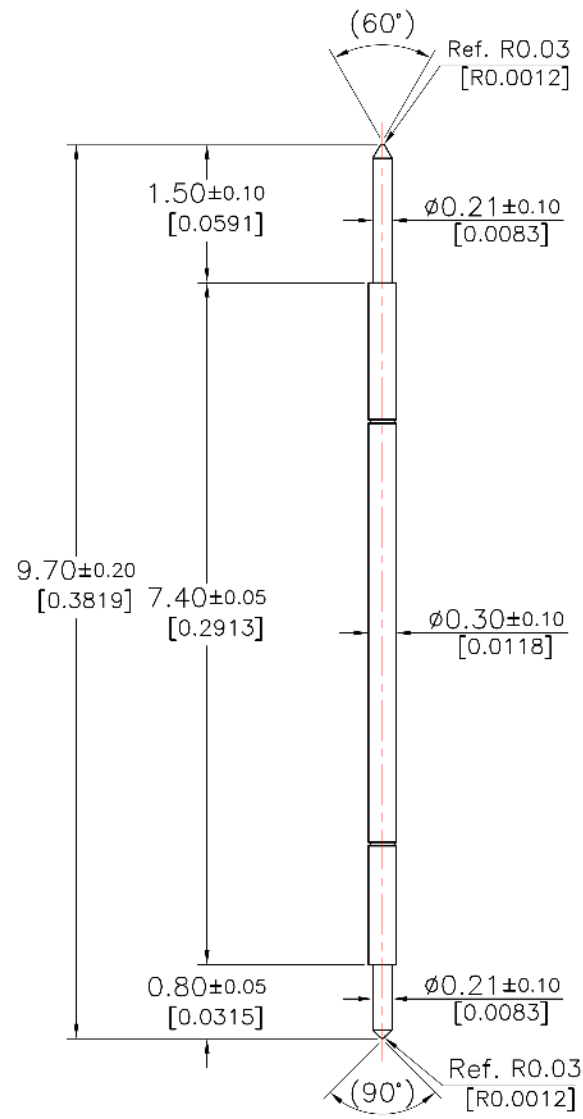

[ BOARD SIDE ]

Pointing Accuracy: ± 0.05 mm

Spring Force [±3g]

2.8g (0.116oz) at initial travel

6.4g (0.228oz) at 0.80mm (0.0315) recommended travel

8.4g (0.296oz) at 1.30mm (0.0512) full travel

Material & Finish

Plunger (Device)	Hardened Beryllium Copper	/	Gold Plated
Plunger (Board)	Hardened Beryllium Copper	/	Gold Plated
Barrel	Phosphor Bronze	/	Gold Plated
Spring	Stainless Steel	/	Gold Plated

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN MILLIMETERS  
 SURFACE FINISH:  
 GENERAL TOLERANCES: ±0.10  
 LINEAR:  
 ANGULAR:

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

	<b>EMULATION TECHNOLOGY, INC.</b>	
	— VLSI and SMT ADAPTERS and ACCESSORIES —	
759 FLYNN ROAD CAMARILLO, CA 93012		TEL: (805) 383-8480 FAX: (805) 383-8484
SHEET: 1 OF 1	DATE: 6/18/14	REVISION: A
CHECKED:		PREPARED BY: T. FOOTE
DO NOT SCALE DRAWING		ITEM: POGO-PIN-9.70-4
DESCRIPTION: POGO-PIN-9.70-4		