


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	02/19/15	JAG

SKT4134

[DEVICE SIDE]

[BOARD SIDE]

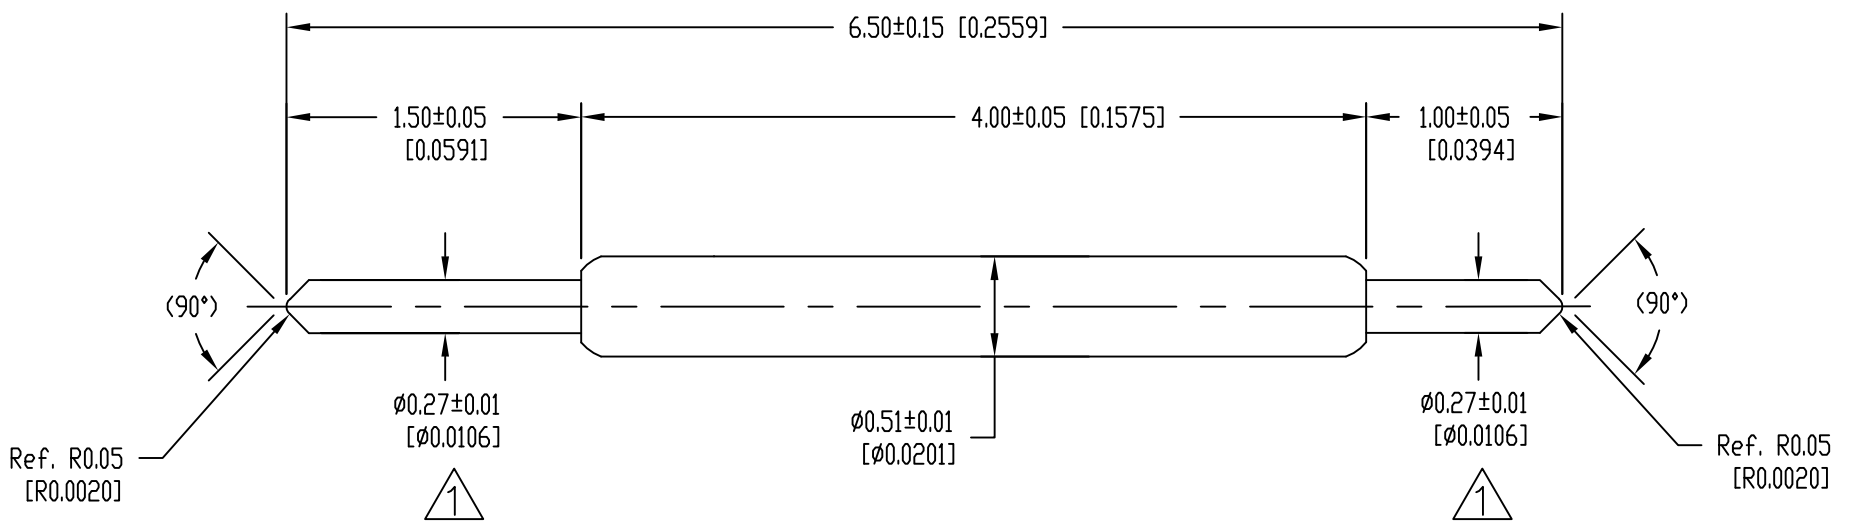

**1** WARNING: IT IS HIGHLY RECOMMENDED TO TAKE THE POINTING ACCURACY IN FULL CONSIDERATION IN HOUSING DESIGN TO AVOID SHORT PROBLEM(S) OR ABNORMAL MECHANICAL OPERATION.

POINTING ACCURACY: ±0.06mm

SPRING FORCE [±20%]  
 6.5g (0.229oz) at INITIAL TRAVEL  
 19.0g (0.670oz) at 0.80mm (0.0315) RECOMMENDED TRAVEL  
 22.7g (0.800oz) at 1.05mm (0.0413) FULL TRAVEL

PART	MATERIAL	FINISH
PLUNGER (DEVICE SIDE)	HARDENED BERYLLIUM COPPER	/GOLD PLATED
PLUNGER (BOARD SIDE)	HARDENED BERYLLIUM COPPER	/GOLD PLATED
BARREL	PHOSPHOR BRONZE	/GOLD PLATED
SPRING	MUSIC WIRE	/GOLD PLATED

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

**ET** **EMULATION TECHNOLOGY, INC.**  
 — VLSI and SMT ADAPTERS and ACCESSORIES —

759 FLYNN ROAD  
 CAMARILLO, CA 93012

TEL: (805) 383-8480  
 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 02/19/15	REVISION: A	<b>ASSEMBLY DRAWING</b>
CHECKED:	DRAWN: J. GELACIO	ITEM: POGO-PIN-6.50-1	DESCRIPTION: POGO-PIN-6.50-1
DO NOT SCALE DRAWING			