


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	5/11/15	TF
B	SPRING FORCE & MATERIAL CHG	06/23/15	JAG

SKT4158

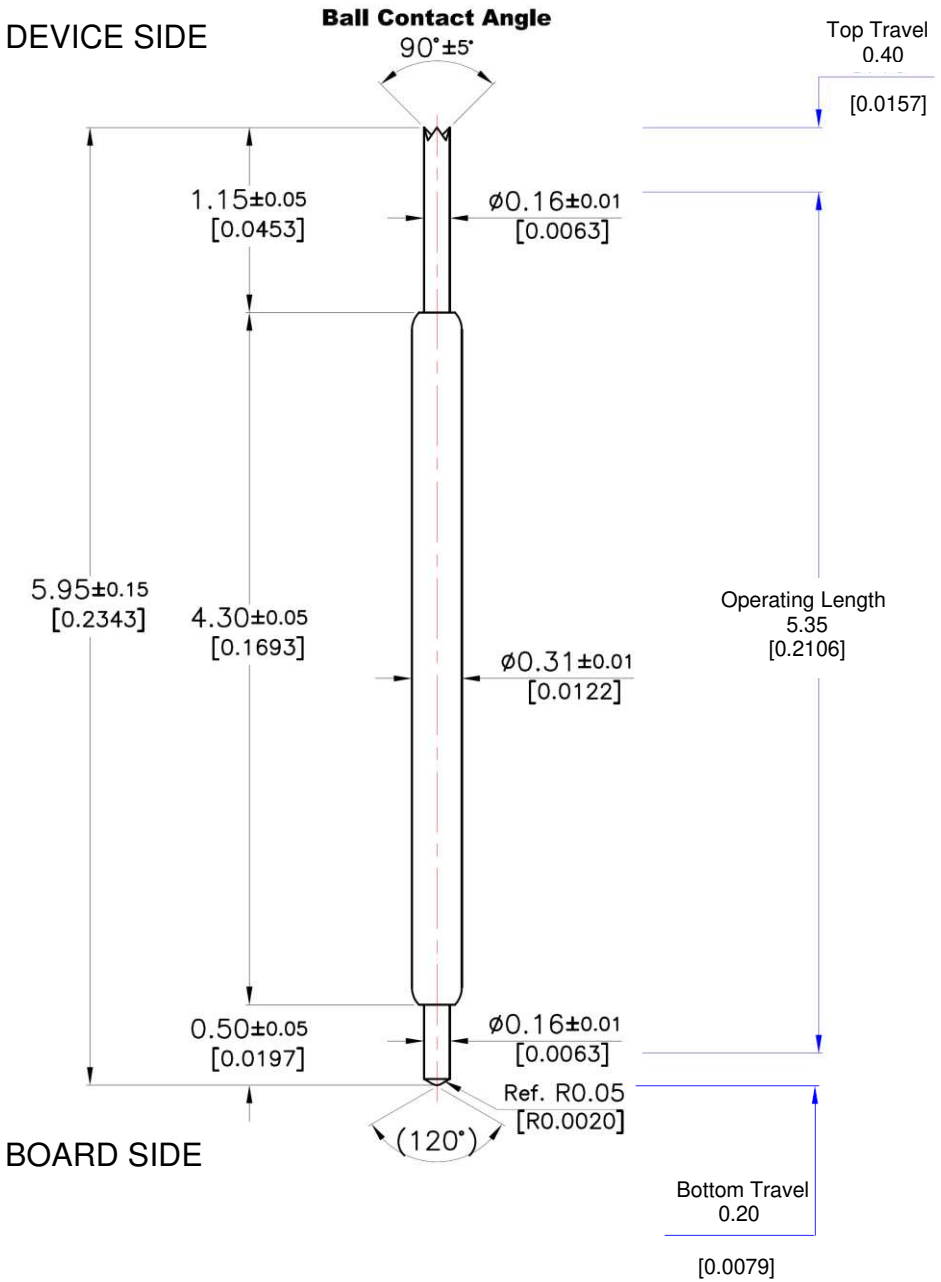

*** Notice :**
DUT board compliance 0.20mm travel or greater required.
 - Note : Durability of probe may be affected if less travel is used.

Pointing Accuracy: ± 0.05 mm

Spring Force [±3g]
 3.7g (0.130oz) at initial travel
 13.0g (0.458oz) at 0.60mm (0.0236") recommended travel
 17.6g (0.619oz) at 0.90mm (0.0354") full travel

Material & Finish
 Plunger (Device side) Hardened Beryllium Copper / Gold Plated
 Plunger (Board side) Hardened Beryllium Copper / Gold Plated
 Barrel Brass / Gold Plated
 Spring Hardened Beryllium Copper Wire / Gold Plated

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED			
		EMULATION TECHNOLOGY, INC. VLSI and SMT ADAPTERS and ACCESSORIES	
		759 FLYNN ROAD CAMARILLO, CA 93012	TEL: (805) 383-8480 FAX: (805) 383-8484
SHEET: 1 OF 1	DATE: 5/11/15	REVISION: B	ASSEMBLY DRAWING
CHECKED:	PREPARED BY: T. FOOTE	ITEM: POGO-PIN-5.95-4	
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-5.95-4

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN MILLIMETERS
 SURFACE FINISH:
 GENERAL TOLERANCES: ±0.10
 LINEAR:
 ANGULAR: