


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	05/13/15	JAG

SKT4159

[DEVICE SIDE]

[BOARD SIDE]

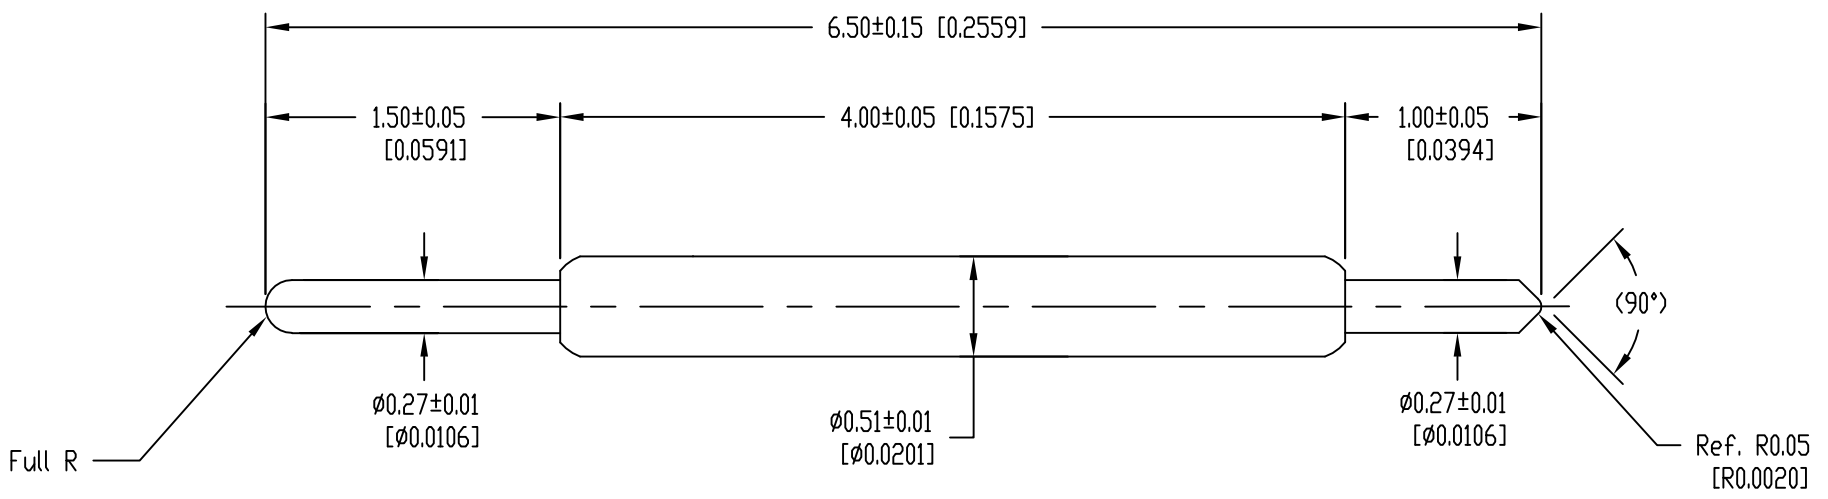

POINTING ACCURACY: ±0.06mm

NOTICE: TO AVOID ISSUES WITH SHORTING OR ABNORMAL MECHANICAL OPERATION, IT IS HIGHLY RECOMMENDED TO CONSIDER THE POINTING ACCURACY IN HOUSING DESIGN.

SPRING FORCE [±20%]
 6.5g (0.229oz) at INITIAL TRAVEL
 19.0g (0.670oz) at 0.80mm (0.0315) RECOMMENDED TRAVEL
 22.7g (0.800oz) at 1.05mm (0.0413) FULL TRAVEL

PART	MATERIAL	FINISH
PLUNGER (DEVICE SIDE)	HARDENED BERYLLIUM COPPER	/GOLD PLATED
PLUNGER (BOARD SIDE)	HARDENED BERYLLIUM COPPER	/GOLD PLATED
BARREL	PHOSPHOR BRONZE	/GOLD PLATED
SPRING	MUSIC WIRE	/GOLD PLATED

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

EMULATION TECHNOLOGY, INC.
 — VLSI and SMT ADAPTERS and ACCESSORIES —

759 FLYNN ROAD
 CAMARILLO, CA 93012

TEL: (805) 383-8480
 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 05/13/15	REVISION: A	ASSEMBLY DRAWING
CHECKED:	DRAWN: J. GELACIO	ITEM: POGO-PIN-6.50-2	DESCRIPTION: POGO-PIN-6.50-2
DO NOT SCALE DRAWING			