


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	12/7/15	TF

SKT4216

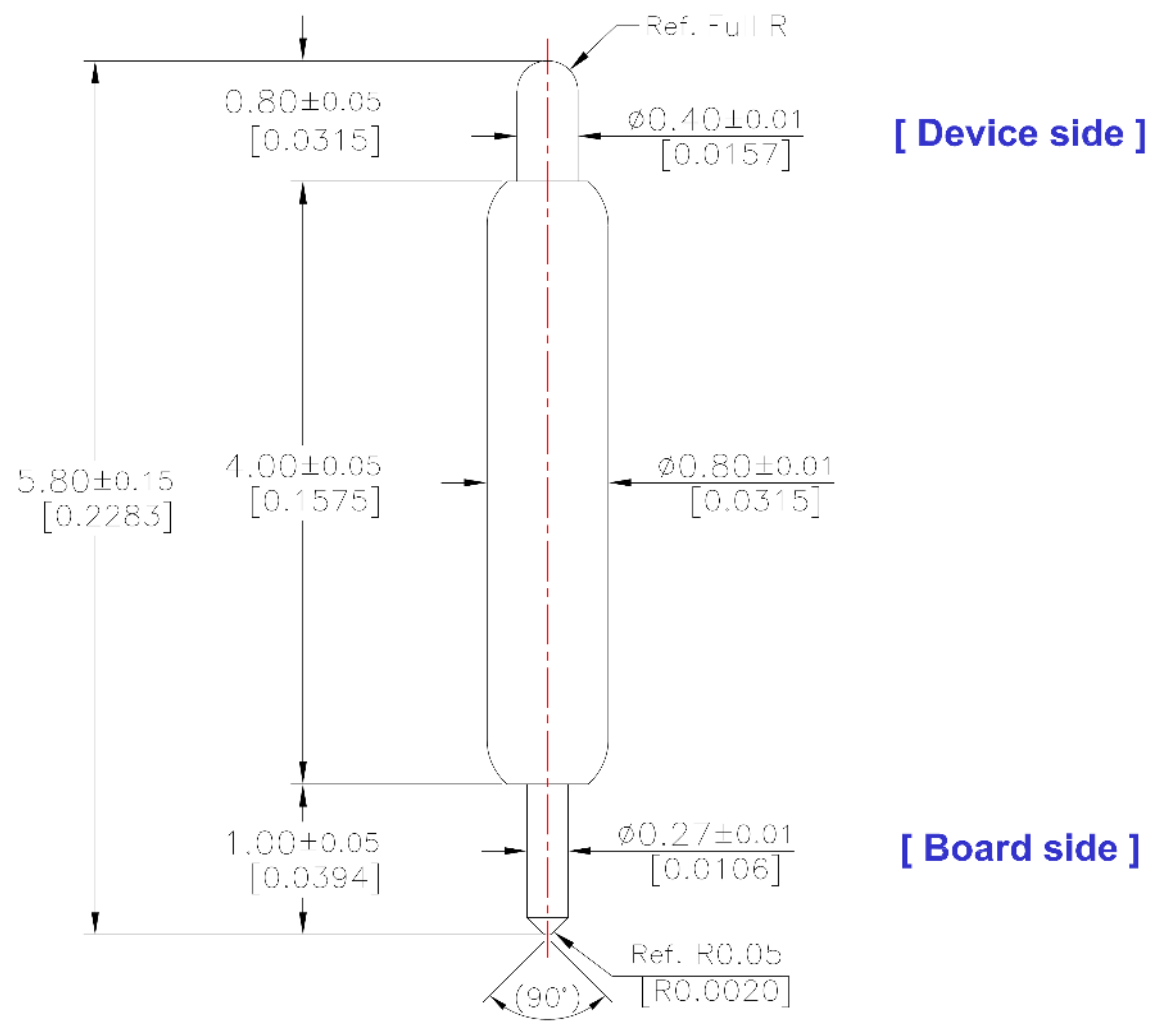

[Device side]

[Board side]

Unit : Millimeter[inch]

Pointing accuracy : ± 0.055 mm
 Spring force [±20%]
 3.6g(0.128oz) at initial travel
 19.0g(0.669oz) at 0.80mm(0.0315") recommended travel
 23.8g(0.839oz) at 1.05mm(0.0413") full travel

Material & Finish

Plunger [Device side]	Hardened Beryllium copper	/ Gold Plated
Plunger [Board side]	Hardened Beryllium copper	/ Gold Plated
Barrel	Phosphor Bronze	/ Gold Plated
Spring	Music Wire	/ Gold Plated

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

		EMULATION TECHNOLOGY, INC. VLSI and SMT ADAPTERS and ACCESSORIES	
		759 FLYNN ROAD CAMARILLO, CA 93012	TEL: (805) 383-8480 FAX: (805) 383-8484
SHEET: 1 OF 1	DATE: 12/7/15	REVISION: A	ASSEMBLY DRAWING
CHECKED:		PREPARED BY: T. FOOTE	ITEM: POGO-PIN-5.80-9
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-5.80-9