


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	03/02/16	MN

SKT4248

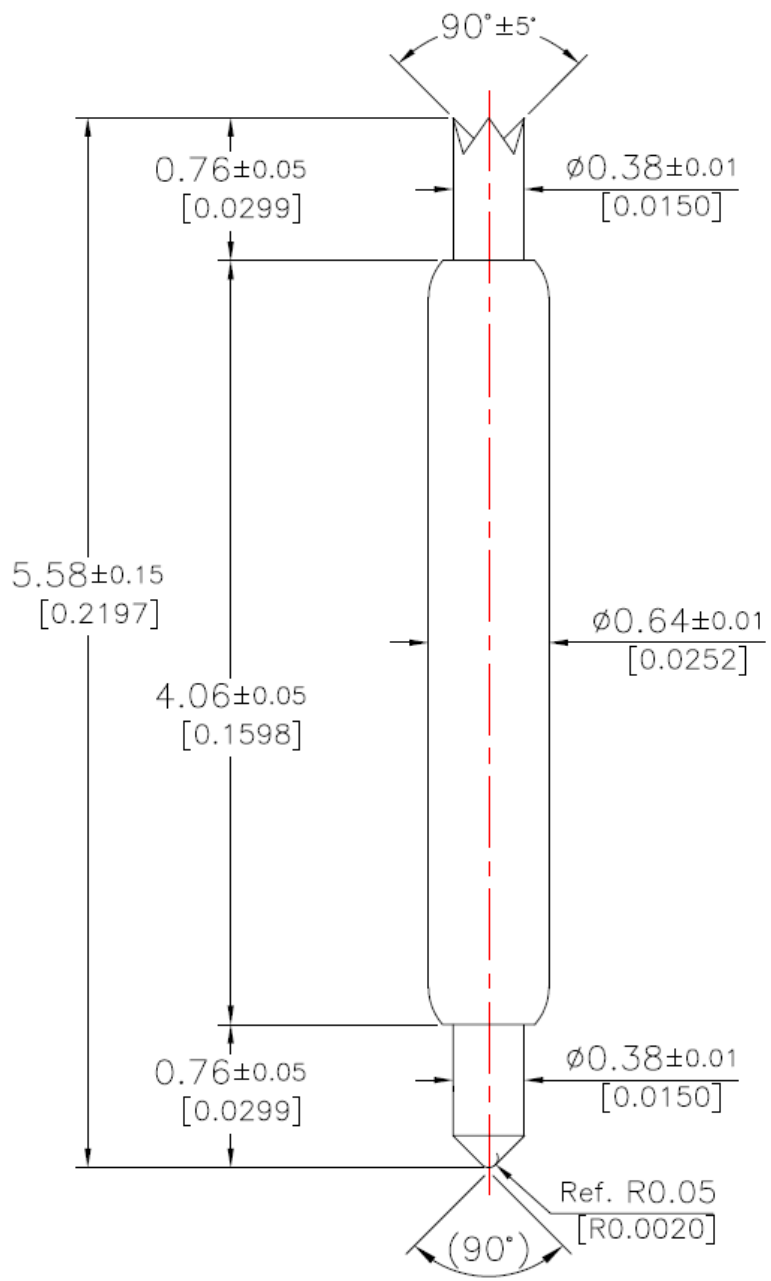

[ Device side ]

Pointing Accuracy:  $\pm 0.05$  mm

Spring Force:  $\pm 20\%$

STATE	TRAVEL	SPRING FORCE
Initial Travel	--	10.0g (0.236oz)
Recommended Travel	0.65mm (0.0256")	19.0g (1.252oz)
Full Travel	1.00mm (0.0394")	23.9g (1.834oz)

PART	MATERIAL	FINISH
Spring	Stainless Steel	Gold Plated
Barrel	Phosphor Bronze	Gold Plated
Plunger [Board]	Hardened Beryllium Copper	Gold Plated
Plunger [Device]	Hardened Beryllium Copper	Gold Plated

[ Board side ]

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

**EMULATION TECHNOLOGY, INC.**  
 VLSI and SMT ADAPTERS and ACCESSORIES

741 FLYNN ROAD  
 CAMARILLO, CA 93012

TEL: (805) 383-8480  
 FAX: (805) 383-8484

SHEET: 1 OF 1    DATE: 03/02/16    REVISION: A

CHECKED:    PREPARED BY: Marco Nunes    ITEM: POGO-PIN-5.58-3

DO NOT SCALE DRAWING    DESCRIPTION: POGO-PIN-5.58-3