


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	11/08/16	RF

SKT4311

[TOP SIDE]

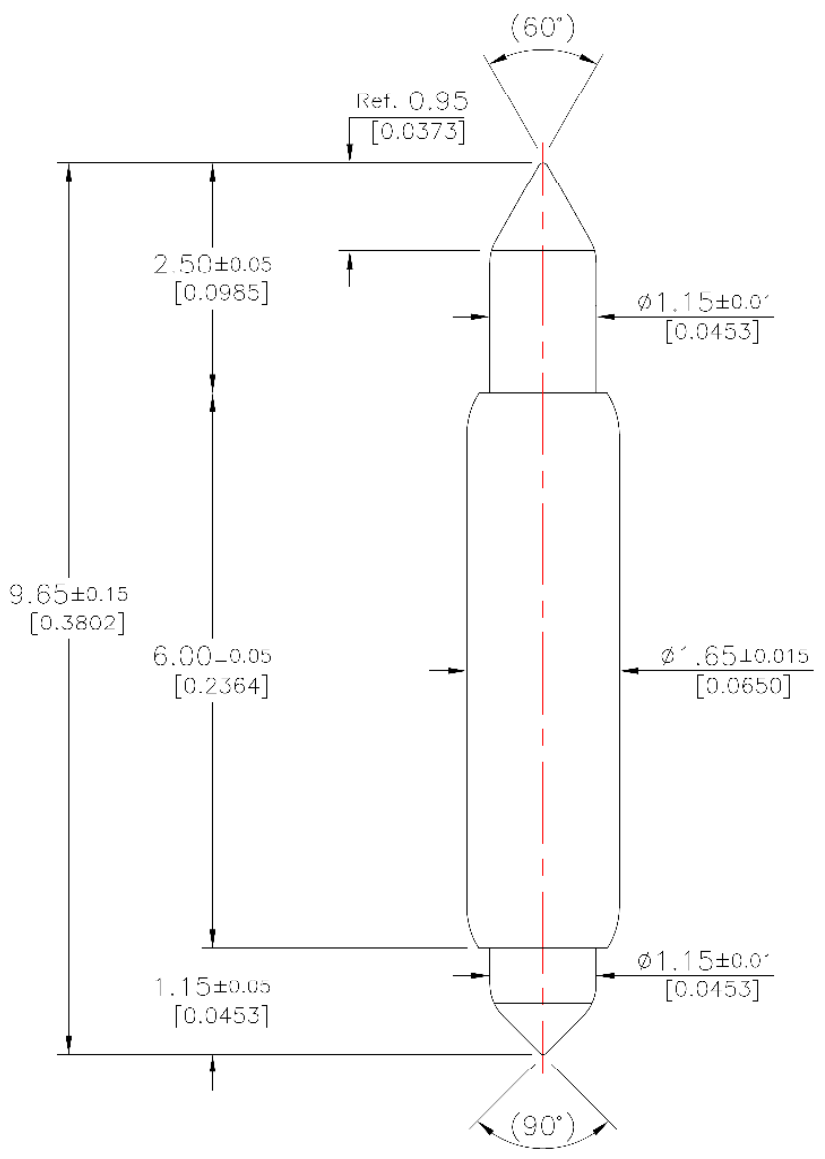

[BOTTOM SIDE]

Pointing Accuracy: ± 0.10 mm

Spring Force: ± 20%

STATE	TRAVEL	SPRING FORCE
Initial Travel	--	3.6g (0.128oz)
Recommended Travel	0.70mm (0.0276")	19.0g (0.672oz)
Full Travel	1.05mm (0.0413")	26.7g (0.943oz)

PART	MATERIAL	FINISH
Spring	Stainless Steel	Gold Plated
Barrel	Brass	Gold Plated
Top Plunger	Hardened Beryllium Copper	Gold Plated
Bottom Plunger	Hardened Beryllium Copper	Gold Plated

**\*Notice:** The pointing accuracy needs to be considered in housing design due to possible shorting and/or abnormal mechanical operation.

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED



**EMULATION TECHNOLOGY, INC.**  
 VLSI and SMT ADAPTERS and ACCESSORIES  
 741 FLYNN ROAD  
 CAMARILLO, CA 93012  
 TEL: (805) 383-8480  
 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 11/08/16	REVISION: A	<b>ASSEMBLY DRAWING</b>
CHECKED:	PREPARED BY: R. FLORES	ITEM: POGO-PIN-9.65-1	DESCRIPTION: POGO-PIN-9.65-1
DO NOT SCALE DRAWING			