


2mm	Socket	Single Row - Screw Machine Socket	Straight	Thru Hole
-----	--------	-----------------------------------	----------	-----------

2mm Center - Single Row Straight - using Screw Machine Contacts

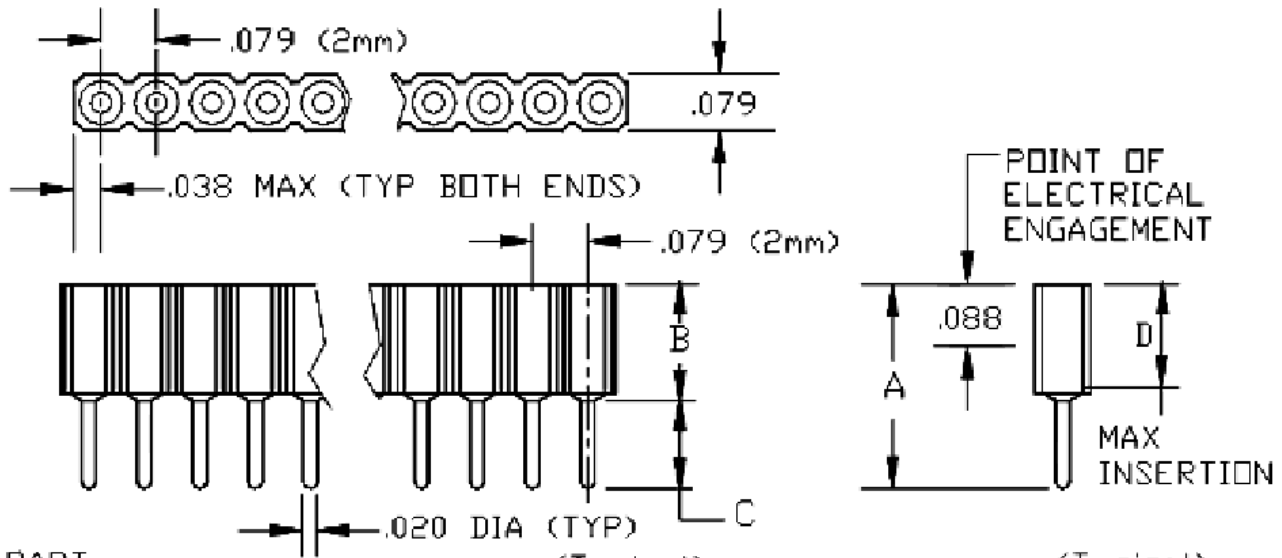

PART NUMBER	PIN		(Typical) INSERTION FORCE	(Typical) EXTRACTION FORCE
1200	.020" Square		7.8oz (220grams)	4.9oz (139 grams)
1200	.020" Round		5.5oz (157grams)	3.3oz (93 grams)
1201	.020" Square		2.6oz (73 grams)	1.8oz (51 grams)
1201	.020" Round		1.8oz (52grams)	1.1oz (32 grams)
1202	.020" Square		2.6oz (73 grams)	1.8oz (51 grams)
1202	.020" Round		1.8oz (52grams)	1.1oz (32 grams)
1203	.020" Square		7.8oz (220grams)	4.9oz (139 grams)
1203	.020" Round		5.5oz (157grams)	3.3oz (93 grams)
1204	.020" Square		8.6oz (244 grams)	5.4oz (152 grams)
1204	.020" Round		5.7oz (161grams)	3.6oz (102 grams)

Base Part Number	A		B		C		D		E		Plating Options	Number of Postions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1202	5.72	0.225	4.19	0.165	1.52	0.060	3.81	0.150			G2LF: TLF	2-50
1201	6.73	0.265	4.19	0.165	2.54	0.100	3.81	0.150			G2LF: TLF	2-50
1200	7.37	0.290	4.19	0.165	3.18	0.125	3.81	0.150			G2LF: TLF	2-50
1203	9.02	0.355	4.44	0.175	4.57	0.180	3.81	0.150			G2LF: TLF	2-50
1204	13.08	0.515	4.44	0.175	8.71	0.343	3.81	0.150			G2LF: TLF	2-50

Technical Notes	
Contact Material:	Shell: Phosphor Bronz - Contact Clip: 6 finger BeCu [#32 -43 - Di-172]
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	1 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Insertion Force:	See bottom of drawing above
Extraction Force:	See bottom of drawing above
Plastic:	High Temperature Plastic
<p><i>INTERCONNECT SYSTEMS INC.</i> 741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com</p>	