


2mm	Socket	Single Row - Press Fit	Straight	Thru Hole
-----	--------	------------------------	----------	-----------

2mm Center - Single Row Straight - Press Fit Socket

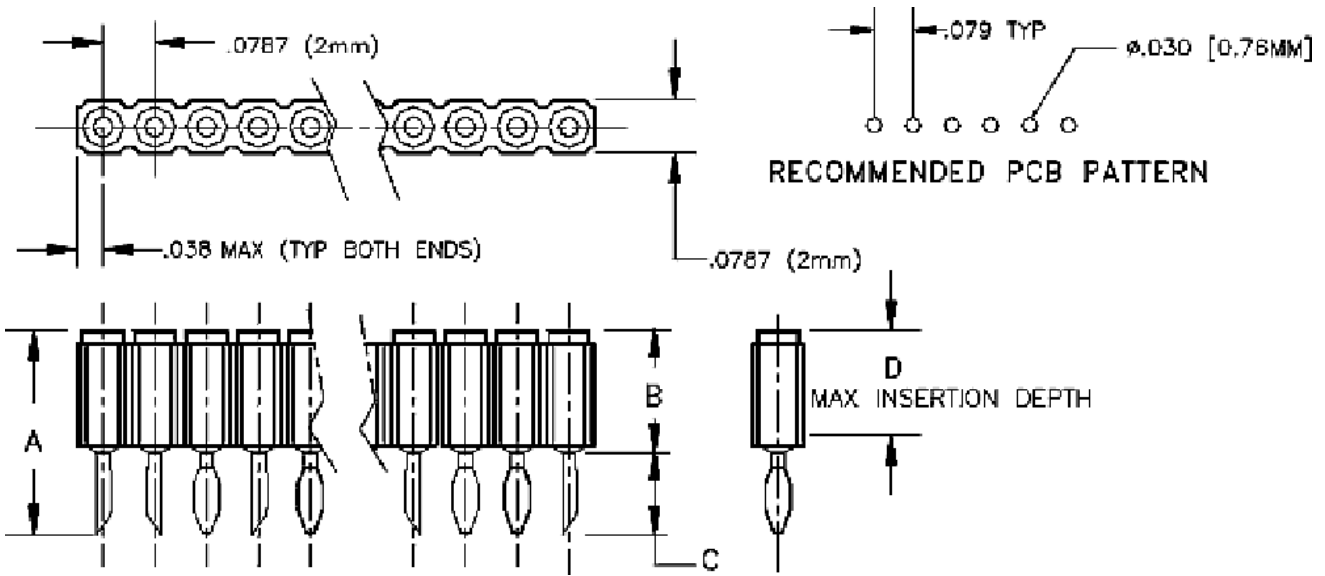

Base Part Number	A		B		C		D		E		Plating Options	Number of Postions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1200C 1 row	8.00	0.315	4.57	0.180	3.43	0.135	3.81	0.150			G1	2-40

Technical Notes	
Contact Material:	Shell: Phosphor Bronz, Contact Clip: BeCu spring
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	1 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Insertion Force:	Typ initial per: 175 grams (6.2oz) w/.020" rd pin & 143 grams (5.0oz) w/.018" rd pin
Extraction Force:	Typ initial per: 103 grams (3.6oz) w/.020" rd pin & 84 grams (3.0oz) w/.018" rd pin
Plastic:	High Temperature Plastic
INTERCONNECT SYSTEMS INC.	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com	