


2mm	Socket	Double Row – SMS Extender	Straight	Thru Hole
-----	--------	---------------------------	----------	-----------

2mm Center, Double Row Straight, Extender, using Screw Machine Contacts

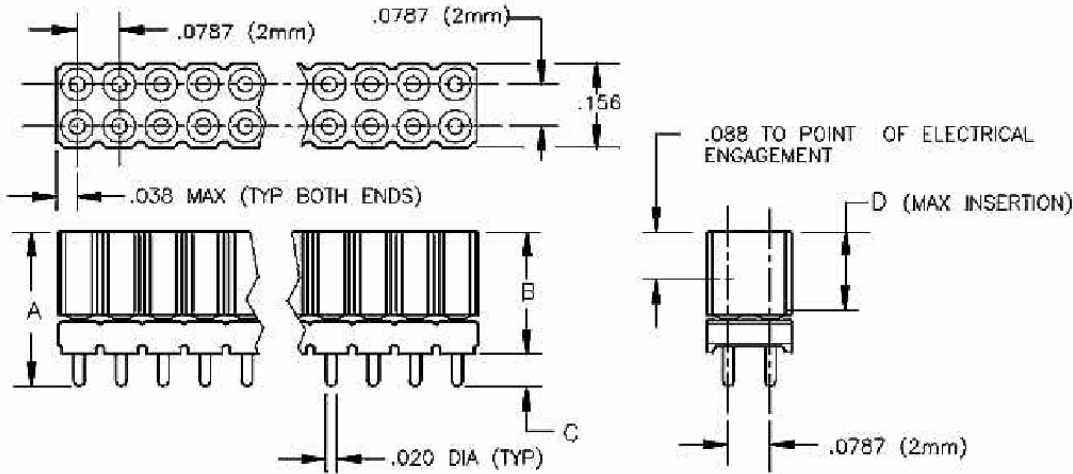

Base Part Number	A		B		C		D		E		Plating Options	Number of Postions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1255	9.14	0.360	6.22	0.245	2.92	0.115	3.81	0.150			G2LF : TLF	4-100
1259 Non-Stack	11.68	0.460	9.35	0.368	2.34	0.092	5.08	0.200			G2LF : TLF	4-100
1257	13.08	0.515	10.54	0.415	2.54	0.100	3.81	0.150			G2LF : TLF	4-100
1256	13.08	0.515	8.89	0.350	4.19	0.165	3.81	0.150			G2LF : TLF	4-100
1260 Stackthrough	21.34	0.840	9.35	0.368	11.99	0.472	5.08	0.200			G1	4-100

Technical Notes	
Contact Material:	Shell: Phosphor Bronz - Contact Clip: 6 finger BeCu [#32]
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	1 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Insertion Force:	Typ initial per: 160 grams (5.6oz) w/.020" rd pin & 209 grams(7.4oz) w/.020" sq pin [#32]
Extraction Force:	Typ initial per: 97 grams (3.4oz) w/.020" rd pin & 116 grams(4.1oz) w/.020" sq pin [#32]
Plastic:	High Temperature Plastic
INTERCONNECT SYSTEMS INC.	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com	