


2mm	Socket	4 Row .800 inch Stackthrough (available in press fit)	4 Row	Thru Hole
-----	--------	--	-------	-----------

.800 centerline - 4 Row Stackthrough (see p/n 1241 for non-stackthrough)

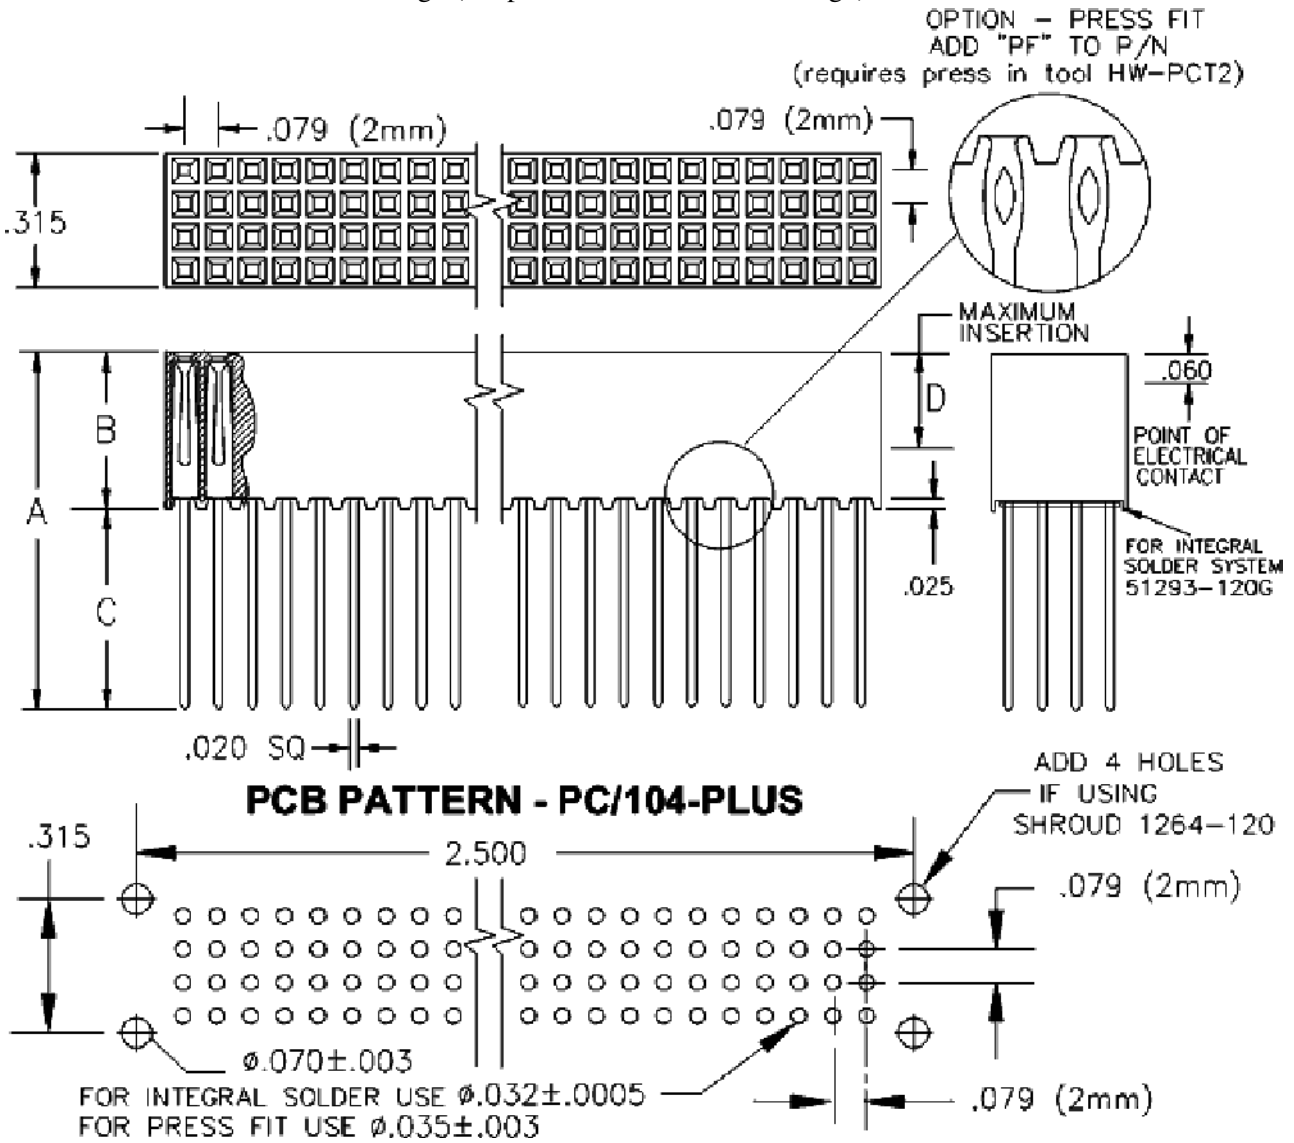

Base Part Number	A		B		C		D		E		Plating Options	Number of Postions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
<b>1244</b> Stackthrough	24.84	0.978	9.35	0.368	15.49	0.610	6.35	0.250			G	4-120
<b>1244PF</b> Press Fit	24.84	0.978	9.35	0.368	15.49	0.610	6.35	0.250			G	4-120
<b>51293</b> w/ solder	24.84	0.978	9.35	0.368	15.49	0.610	6.35	0.250			G	4-120

<b>Technical Notes</b>	
<b>Contact Material:</b>	Phosphor Bronze - Ultra Low Insertion Force contact design
<b>Insulation Material:</b>	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
<b>Heat Deflection:</b>	260°C @ 264 PSI per ASTM D648
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Current Rating:</b>	1 amps continuous @ 80 ambient
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Insertion Force:</b>	Typ initial per: 60 grams (2.1 oz) w/.020 inch square pin
<b>Extraction Force:</b>	Typ initial per: 40 grams(1 .4 oz) w/.020 inch square pin
<b>Plastic:</b>	High Temperature Plastic
<p><b><i>INTERCONNECT SYSTEMS INC.</i></b>            741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail:<a href="mailto:info@isipkg.com">info@isipkg.com</a></p>	