


2mm	Socket	6 Row .800 inch Stackthrough	6 Row	Thru Hole
-----	--------	------------------------------	-------	-----------

.800 board centerline - 6 Row Stackthrough

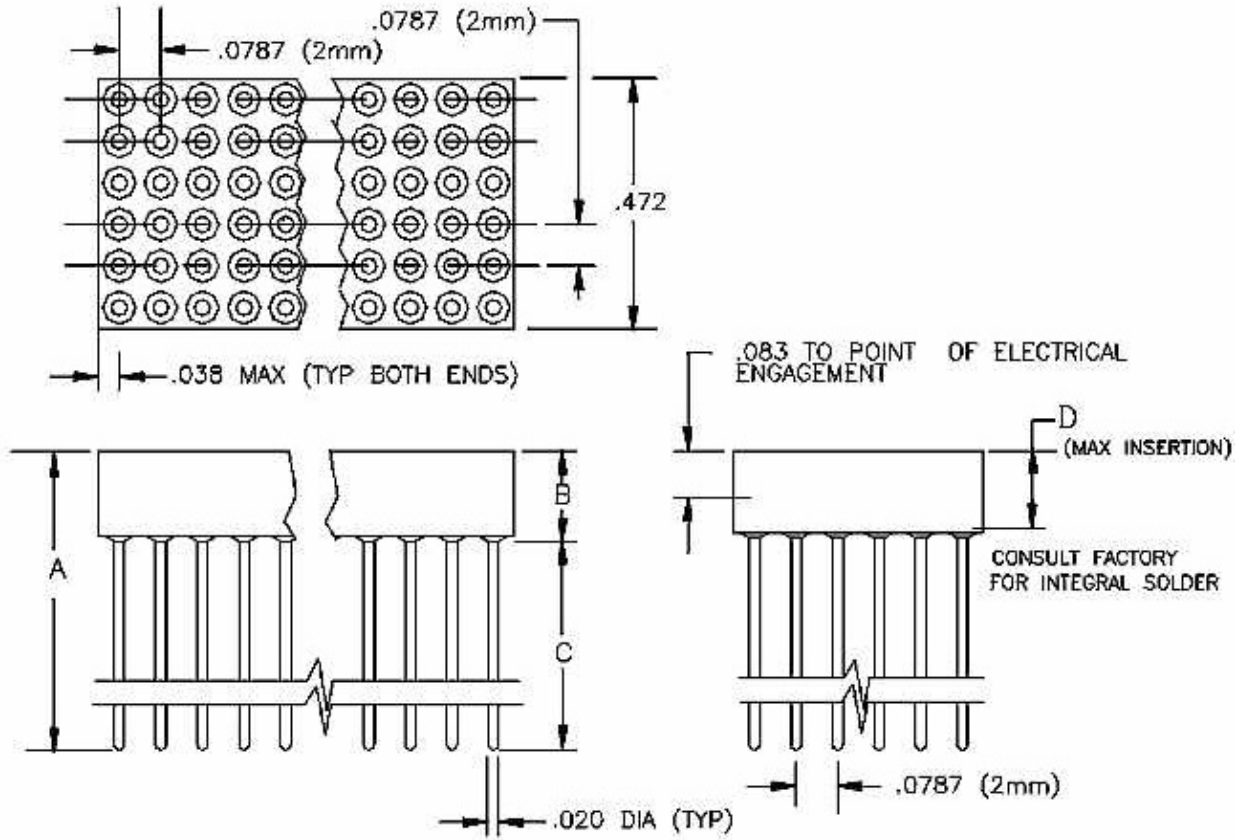

Base Part Number	A		B		C		D		E		Plating Options	Number of Postions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1292 Stackthrough	23.88	0.940	4.19	0.165	19.68	0.775	3.81	0.150			G	48-150

Technical Notes	
Contact Material:	Shell: Phosphor Bronze - Contact Clip: 6 finger BeCu [#43]
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	1 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Insertion Force:	Typ initial: 52 grams(1.8oz) w/.020" rd pin 73 grams(2.6oz) w/.020" sq pin [#43]
Extraction Force:	Typ initial: 32 grams(1.1oz) w/.020" rd pin 51 grams(1.8oz) w/.020" sq pin [#43]
Plastic:	High Temperature Plastic
<p><i>INTERCONNECT SYSTEMS INC.</i> 741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail:info@isipkg.com</p>	