


2mm	Socket	Single Row - Screw Machine Socket	Rt Angle	Surface Mount
-----	--------	-----------------------------------	----------	---------------

2mm Center, Single Row Right Angle, Screw Machine SMD Socket

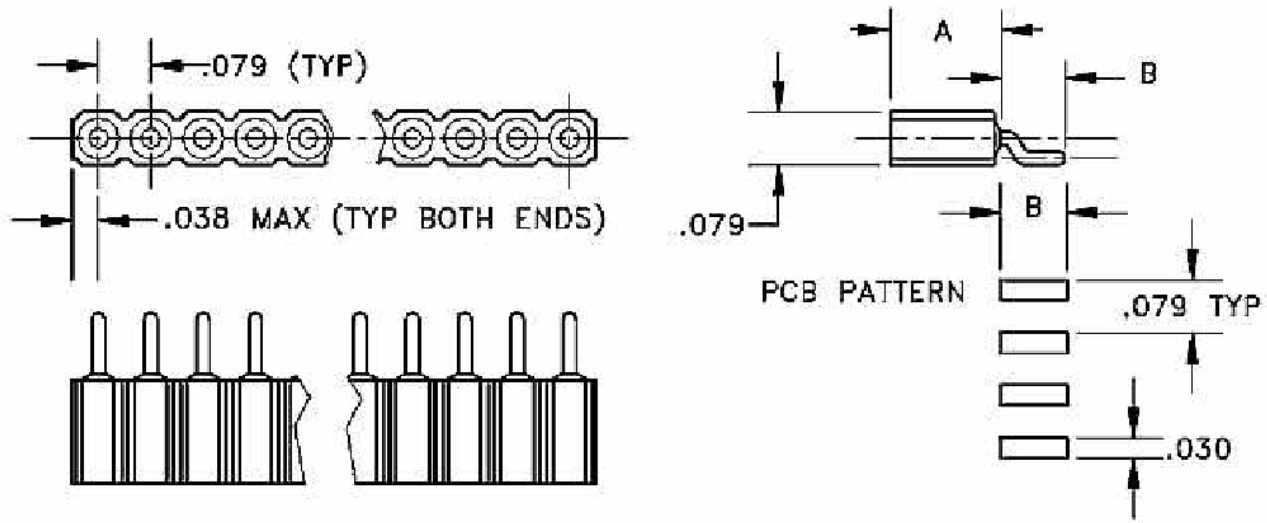

Base Part Number	A		B		C		D		E		Plating Options	Number of Postions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1355	4.19	0.165	2.92	0.115							G2LF : TLF	2-10

Technical Notes	
Contact Material:	Shell: Phosphor Bronze - Contact Clip: 6 finger BeCu [#43]
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	1 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Insertion Force:	Typ initial: 52 grams(1.8oz) w/.020" rd pin 73 grams(2.6oz) w/.020" sq pin [#43]
Extraction Force:	Typ initial: 32 grams(1.1oz) w/.020" rd pin 51 grams(1.8oz) w/.020" sq pin [#43]
Plastic:	High Temperature Plastic
INTERCONNECT SYSTEMS INC. 741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com	