


.100	Socket	Single Row – for .025” Low Profile	Straight	Thru Hole
-------------	---------------	---	-----------------	------------------

.100” Center – Single Row Straight – Low Profile - accepting .025 inch Square Pin - Socket

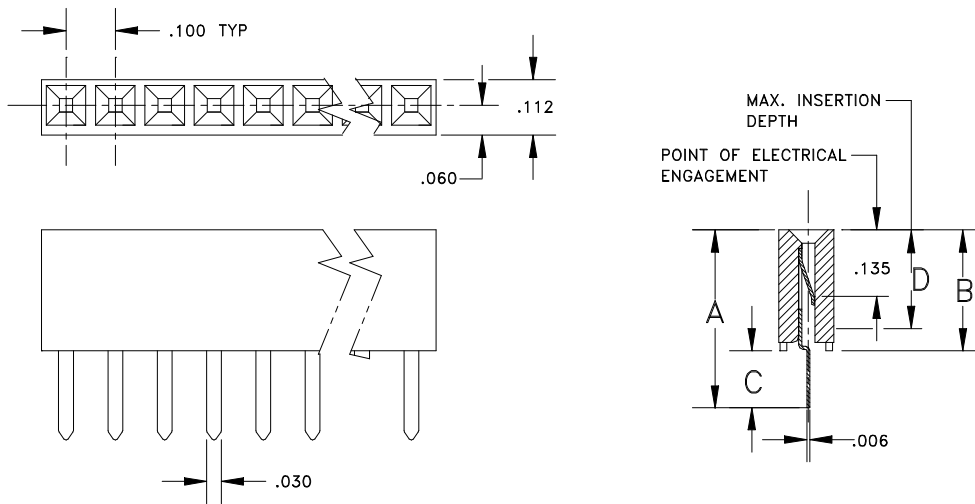

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1106	9.14	0.360	6.22	0.245	2.92	0.115	6.22	0.245			G230LF :G2LF: TLF	2-40

Technical Notes	
Contact Material:	Contact: Stamped – BeCu – single beam
Insulation Material:	Thermoplastic - UL 94V-0 rated - Black
Temperature Range:	-65°C to 250°C
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	3 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
INTERCONNECT SYSTEMS INC.	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com	