

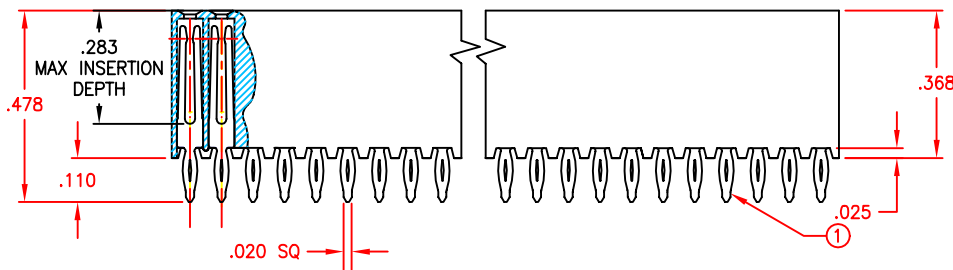


THIS DRAWING CONTAINS PROPRIETARY INFORMATION EXCLUSIVE TO COMM CONN CONNECTORS, AND SHALL NOT BE USED, DUPLICATED OR DISCLOSED IN WHOLE OR IN PART FOR THE MANUFACTURE, PROCUREMENT OR OTHER PURPOSES EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY COMM CONN WORLDWIDE, INC.

REVISIONS

ECO NO:	REV:	DESCRIPTION	DATE	APPROVED
91XXX	A	UPDATED	07.12.06	

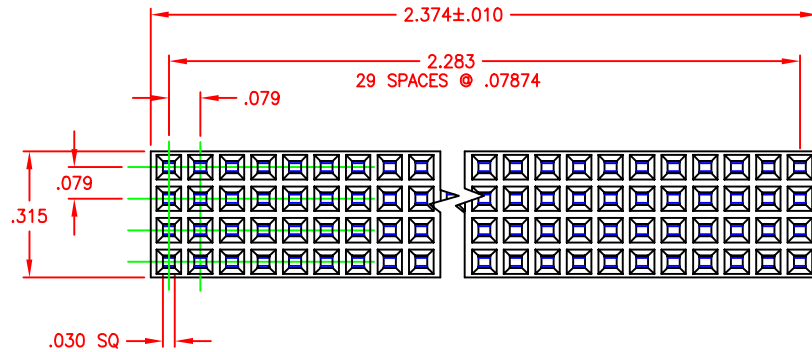

1241PF-120G2

3. MAX NUMBER OF CONTACTS: 120
2. PLATING: G2LF 10 MICRO INCHES OF GOLD MIN PER MIL-G-45204 TYPE II (ENGAGEMENT END) 150 MICROINCHES OF PURE BRIGHT TIN PER MIL-T-10727 (SOLDER TAIL END) OVER 50 MICRO INCHES OF NICKEL PER QQ-N-290
1. MATERIALS: INSULATORS - BLACK, 30% GLASS FILLED THERMOPLASTIC, 94V-0, RATED -65°C TO 250 °C RoHS COMPLIANT XYDAR LCP RESIN: G-930 CONTACT - PHOSPHOR BRONZE, ALLOY 51000

NOTES: UNLESS OTHERWISE SPECIFIED

FIND	QTY	PART NO.	DESCRIPTION
2	1	40343	INSULATOR, 2MM P, 4 ROW STAMPED SKT,
1	A/R	P40683-01	2MM TUNING FORK SOCKET

LIST OF MATERIALS

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ±1/64 .XX ± .02 ±1° .XXX ± .010		TITLE: 2MM P, 4 ROW STAMPED SOCKET NON-STACKTHRU, PC/104-PLUS PRESS FIT	
DRAWN BY: AM	DATE: 5.07.01	CAT. NO: 1241PF-XXYY	SIZE: DWG NO: A 30573
APPROVED:	DATE:	SCALE: 2:1	REV: *
MATERIAL: SEE NOTE 1	FINISH: SEE NOTE 2	TOOL NO:	SHEET 1 OF 1