


2mm	Header	4 Row 120 Pin End of Stack Header (no socket)	Straight	Thru hole
-----	--------	--	----------	-----------

PC104-Plus – 120 position – 4 Row – use for last board in stack – does not have female socket

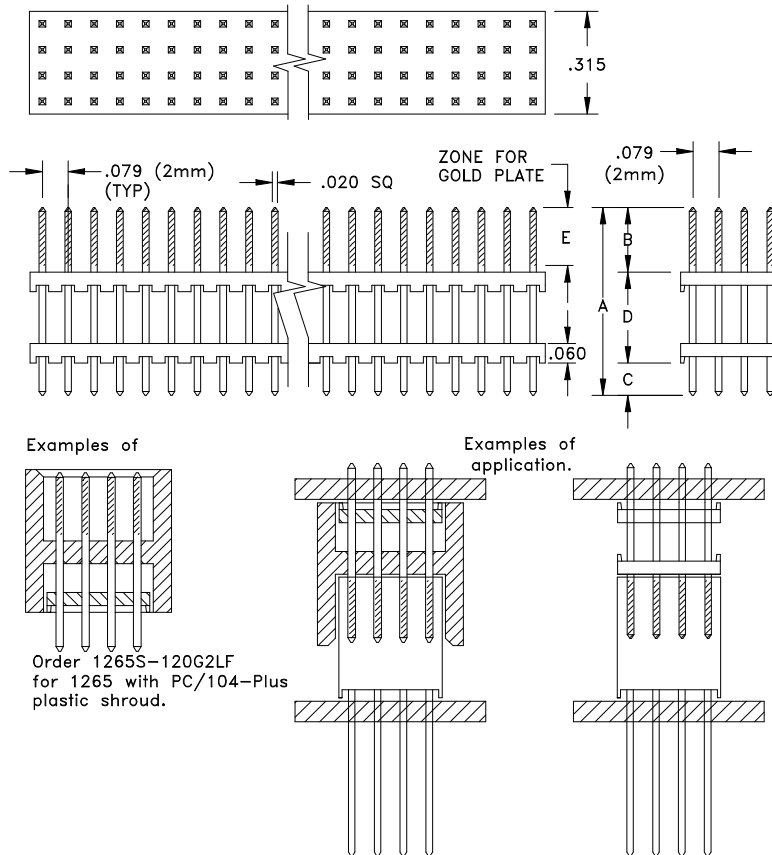

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1265	12.60	0.496	3.81	0.150	2.90	0.114	5.89	0.232	3.81	0.150	G2LF : TLF	4-120
1265S (with shroud)	12.60	0.496	3.81	0.150	2.90	0.114			3.81	0.150	G2LF : TLF	120

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .020"sq pin, burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	2 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
INTERCONNECT SYSTEMS INC.	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com	