


THIS DRAWING CONTAINS PROPRIETARY INFORMATION EXCLUSIVE TO CDMC CON CONNECTORS, AND SHALL NOT BE USED, DUPLICATED OR DISCLOSED IN WHOLE OR IN PART FOR THE MANUFACTURE, PROCUREMENT OR OTHER PURPOSES EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY CDMC CON WORLDWIDE, INC.

REVISIONS

ECO NO:	REV:	DESCRIPTION	DATE	APPROVED
XXXX	A	UPDATE	07.13.06	

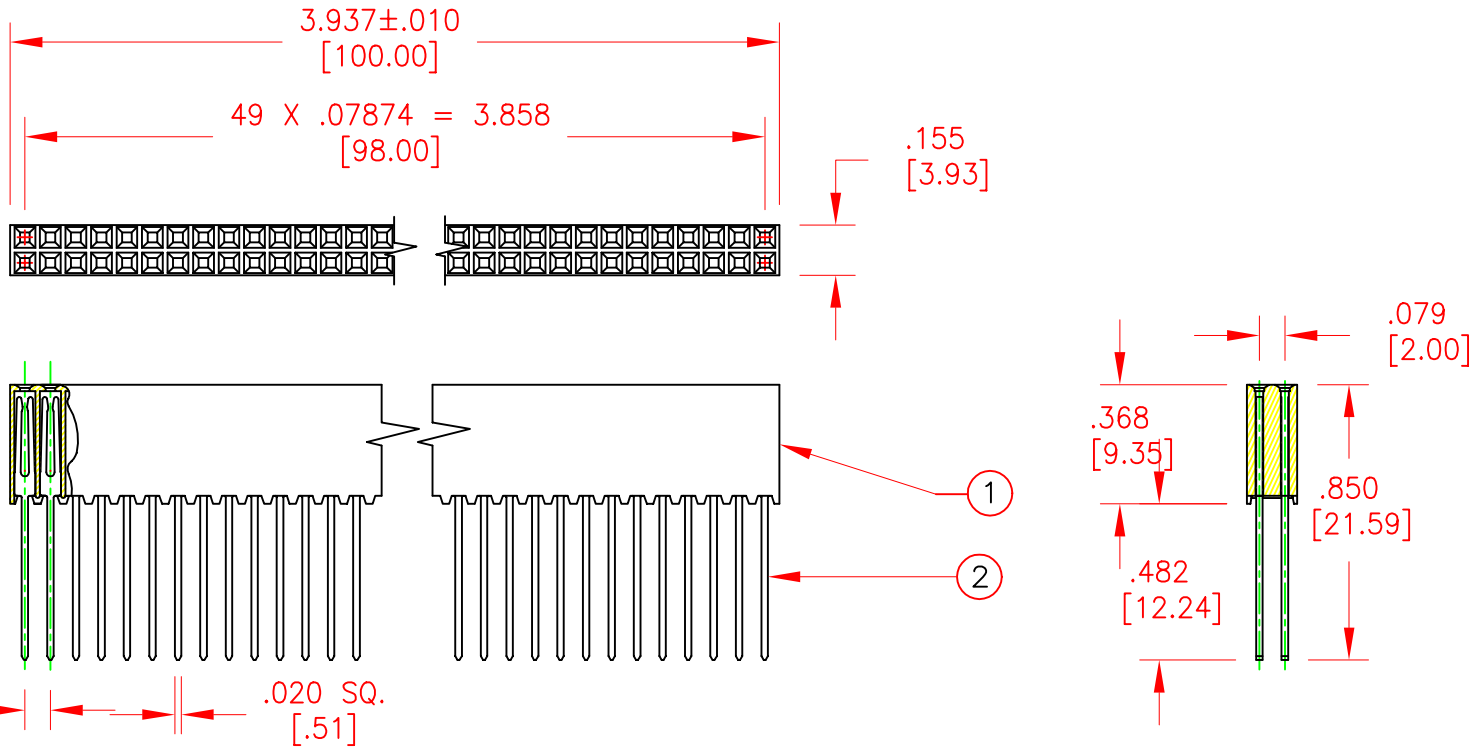

PART NUMBER: 1242H-60G
OR: 1242H-XXXXY

2. MATERIALS: CONTACT – PHOS/BRONZE PER C51000.

INSULATOR – XYDAR LCP RESIN G-930, 30% GF THERMOPLASTIC, 94V-0, BLK.
OPERATING TEMPERATURE: -65°C TO 250°C.
RoHS COMPLIANT

1. FINISH: G GOLD FLASH PLATE PER MIL-G-45204 TYPE II OVER NICKEL PLATE PER QQ-N-290, .000050 MIN.

NOTES: UNLESS OTHERWISE SPECIFIED

FIND	QTY	PART NO.	DESCRIPTION
2	A/R	P40287-02	SOCKET, TUNING FORK, 2MM
1	1	40473	INSULATOR, 2MM. 2 ROW

LIST OF MATERIALS			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ±1/64 .XX ± .02 ±1° .XXX ± .010		TITLE: SOCKET, 2 ROW, 2MM THROUGH HOLE STACKING	
DRAWN BY: JE	DATE: 09.13.05		
APPROVED:	DATE:		
MATERIAL: SEE NOTE 2	CAT. NO: 1242H-XXYY	SIZE: A	DWG NO: 30277
FINISH: SEE NOTE 1	SCALE: 1:1	DRAWING:3XXXX	SHEET 1 OF 1