

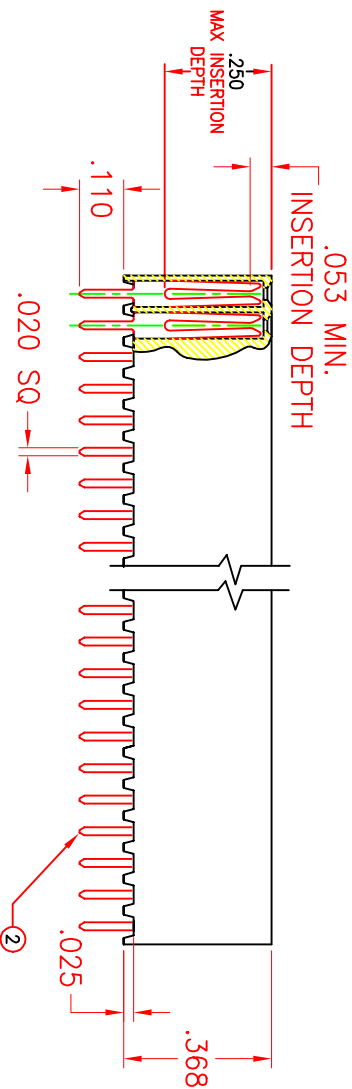


THIS DRAWING CONTAINS PROPRIETARY INFORMATION EXCLUSIVE TO COMM CON CONNECTORS, AND SHALL NOT BE USED IN PART FOR THE MANUFACTURE, PROMISE, OR PERFORMANCE OF ANY PRODUCT, SERVICE OR OTHER PURPOSES EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY COMM CON, WASHINGTON, DC.

| REVISIONS | | | | |
|-----------|------|-------------|----------|----------|
| ECCO NO. | REV. | DESCRIPTION | DATE | APPROVED |
| 91XXXX | * | NEW | 07.11.06 | |

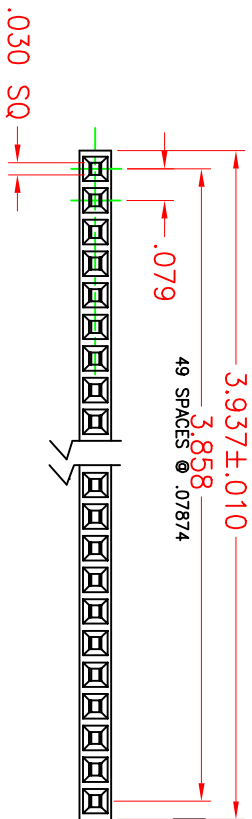

COMM CON P/N 1241Q-XXXX

- MAX NUMBER OF CONTACTS: 50
 - PLATING: G2LF - 10 MICRO INCHES OF GOLD MIN PER MIL-G-45204 TYPE II ON ENGAGEMENT END AND PURE BRIGHT TIN PLATE PER MIL-T-10727 .000150 MIN. ON TERMINATION END OVER NICKEL
 - MATERIALS: INSULATORS - BLACK, 30% GLASS FILLED THERMOPLASTIC, 94V-0, RATED -65°C TO 250 °C XYDAR LCP RESIN: G-930 ROHS COMPLIANT
- CONTACT - PHOSPHOR BRONZE, ALLOY 51000
- NOTES: UNLESS OTHERWISE SPECIFIED

| QTY | A/R | PART NO. | DESCRIPTION |
|-----|-----|-----------|-------------------------------------|
| 1 | 1 | P40287-01 | 2MM TUNING FORK SOCKET |
| 1 | 1 | 40472 | 2MM P, 1 ROW STAMPED INSULATOR SKT. |

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ±1/64 .XX ± .02 ±.XXX ± .010 ±1'

LIST OF MATERIALS
COMM CON WORLDWIDE, INC. a subsidiary of INTERCONNECT SYSTEMS INC.

TITLE: 2MM P, 1 ROW STAMPED SOCKET
PC/104-PLUS

DRAWN BY: AM DATE: 05.08.01
APPROVED: DATE:

MATERIAL: SEE NOTE 1
FINISH: SEE NOTE 2

CAT. NO.: 1241Q-XXXX
SCALE: 2:1
SIZE: DWG NO.: 3XXXXX
TOOL NO.:
SHEET 1 OF 1